

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
12 September 2002 (12.09.2002)

PCT

(10) International Publication Number  
**WO 02/069845 A2**

(51) International Patent Classification<sup>7</sup>: **A61F 2/01**

(21) International Application Number: PCT/US02/06323

(22) International Filing Date: 28 February 2002 (28.02.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/272,657 1 March 2001 (01.03.2001) US  
10/083,810 27 February 2002 (27.02.2002) US

(71) Applicant: **SCIMED LIFE SYSTEMS, INC.** [US/US];  
One SciMed Place, Maple Grove, MN 55311 (US).

(72) Inventors: **GARNER, Joseph**; 9281 Zinnia Lane North,  
Maple Grove, MN 55369 (US). **YOUNG, Matthew, L.**;  
2556 Tyron Lane, Mound, MN 55364 (US). **FORSBERG,**  
**Andrew**; 17210 County Road 6, Apt 302, Plymouth, MN  
55447 (US). **ELLIS, Louis**; 3004 Armour Terrace, St. An-  
thony, MN 55418 (US). **HENDRICKSON, Gary**; 25216  
184th Street, Big Lake, MN 55309 (US).

(74) Agents: **SEAGER, Glenn et al.**; Crompton, Seager &  
Tufte LLC, 331 Second Avenue South, Suite 895, Min-  
neapolis, MN 55401-2246 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,  
SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN,  
YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR,  
GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent  
(BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR,  
NE, SN, TD, TG).


**Published:**

— without international search report and to be republished  
upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

6485,501

(54) Title: INTRAVASCULAR FILTER RETRIEVAL DEVICE HAVING AN ACTUATABLE DILATOR TIP

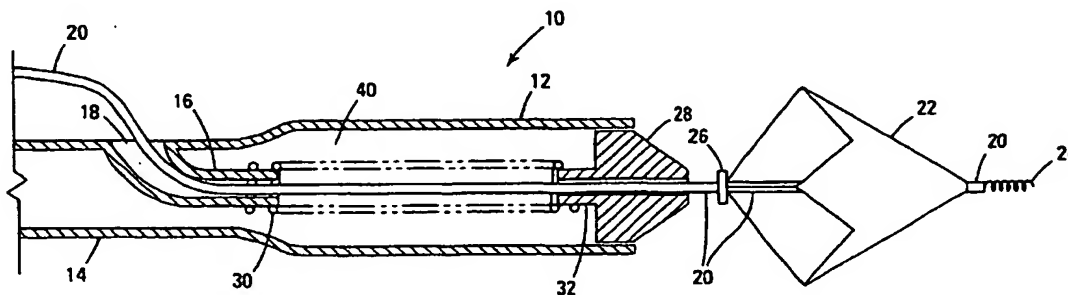

(57) Abstract: A filter retrieval device having an actuatable dilator tip for retrieval of an intravascular filter from a body lumen is disclosed. An outer shaft coupled to a distal sheath is advanced along a filter wire to desired point within the vasculature. An intravascular filter such as a distal protection filter can be advanced along the filter wire to a point distal a lesion to collect debris dislodged during a medical procedure. Disposable in part within the distal sheath is an actuatable dilator tip adapted to retrieve the filter at least in part within the distal sheath. Actuation of the dilator tip may be accomplished by any number of means, including a resilient member such as a spring coil, or by a reduced inner diameter portion disposed on the distal sheath adapted to engage a plurality of surfaces disposed on the dilator tip.

WO 02/069845 A2

## INTRAVASCULAR FILTER RETRIEVAL DEVICE HAVING AN ACTUATABLE DILATOR TIP

5

### Cross Reference to Related Application

The present application claims the benefit of U.S. Provisional Application Serial No. 60/272,657, filed on March 1, 2001.

10

### Field of the Invention

The present invention relates generally to the field of embolic protection devices. More specifically, the present invention pertains to retrieval devices for intravascular filters.

15

### Background of the Invention

Intravascular filters such as embolic protection filters are generally placed within a body lumen, such as an artery or vein, downstream of a site where a therapeutic device will be used. Examples of procedures employing such filters include angioplasty, atherectomy, thrombectomy and stent placement. These procedures typically involve transluminally inserting and delivering within the artery or vein, a filter wire and filter to a location distal a coronary lesion. Once in place, a therapeutic device such as an angioplasty balloon or an atherectomy catheter can be advanced to the site of the lesion to perform the procedure. During the procedure, embolic material such as plaque or thrombus become dislodged from the walls of the body lumen, and flow downstream where they are collected by the filter. After the procedure is performed, the therapeutic device and filter containing the debris, if any, can be removed from the body.

### Summary of the Invention

The present invention relates generally to the field of embolic protection devices. More specifically, the present invention pertains to retrieval devices for intravascular filters. In one embodiment in accordance with the present invention, a  
5 filter retrieval device includes a distal sheath and an outer shaft extending proximally therefrom. A dilator tip is biased toward the distal end of the distal sheath by a resilient member. In one particular implementation, the resilient member may include a spring coil having one or more coils helically disposed along the filter wire. In an  
10 alternative implementation, the resilient member may include a spring having one or more struts longitudinally disposed along the filter wire. In use, the filter retrieval device is advanced along the filter wire until the dilator tip contacts a proximal filter stop. The filter retrieval device is then further advanced such that the filter collapses and is contained at least in part within the distal sheath.

In a similar embodiment, a filter retrieval device comprises a distal sheath and  
15 an outer shaft extending proximally therefrom, an actuatable dilator tip, and an inner shaft disposed at least in part within the lumen formed by the distal sheath. As with the aforementioned embodiment, the dilator tip is biased toward the distal end of the distal sheath by a resilient member such as a spring coil. The inner shaft may have a length substantially similar to the length of the outer shaft. Alternatively, the inner  
20 shaft may have a length substantially shorter than the length of the outer shaft. In the latter case, an exchange port can be disposed on the outer shaft to permit single operator advancement of the filter retrieval device.

In another embodiment of the present invention, a filter retrieval device comprises a distal sheath, a shaft, and a dilator tip slidably disposable along a filter  
25 wire. The distal sheath has a reduced inner diameter portion adapted to engage a

recessed surface disposed on a portion of the dilator tip. In one particular implementation, the recessed surface includes a first recessed surface disposed on a proximal portion of the dilator tip, and a second recessed surface disposed on the dilator tip distal the first recessed surface. Prior to use, the operator attaches the dilator tip to the distal sheath by engaging the reduced inner diameter portion along the first recessed surface. To retrieve the filter, the operator then advances the device along the filter wire until the distal end of the dilator tip contacts the filter stop. Once the dilator tip is attached to the filter stop, further advancement of the dilator tip causes the reduced inner diameter portion of the distal sheath to engage the second recessed surface on the dilator tip. Continued advancement of the dilator tip causes the filter to retract at least in part within the distal sheath. A third recessed surface disposed on the dilator tip distal the second recessed surface may be utilized to provide the operator with tactile feedback that the filter has been retracted into the distal sheath a sufficient distance to permit removal from the body.

15

#### Brief Description of the Drawings

Figure 1 is a cross-sectional view of a filter retrieval device in accordance with the present invention advanced to a distal protection filter;

Figure 2 is a cross-sectional view of the device of Figure 1, wherein the catheter is advanced at least in part over the filter;

Figure 3 is a cross-sectional view of a second embodiment of a filter retrieval device in accordance with the present invention advanced to a distal protection filter;

Figure 4 is a cross-sectional view of the device of Figure 3, wherein the catheter is advanced at least in part over the filter;

Figure 5 is a cross-sectional view of another embodiment of a filter retrieval device in accordance with the present invention advanced to a distal protection filter;

Figure 6 is a cross-sectional view of the device of Figure 5, wherein the catheter is advanced at least in part over the filter;

5        Figure 7 is a plan view of a filter retrieval device in accordance with the present invention, wherein the device includes a plunger assembly;

Figure 8 is a plan view of the filter retrieval device of Figure 7, wherein the device is advanced at least in part over the filter;

10       Figure 9 is a cross-sectional view of a filter retrieval device in accordance with another embodiment of the present invention having a plunger assembly;

Figure 10 is a cross-sectional view of the filter retrieval device of Figure 9, wherein the catheter is advanced at least in part over the filter;

Figure 11 is a cross-sectional view of a filter retrieval device in accordance with the present invention advanced to a distal protection filter;

15       Figure 12 is a cross-sectional view of the device of Figure 11, wherein the catheter is advanced at least in part over the filter;

Figure 13 is a cross-sectional view of a filter retrieval device in accordance with the present invention employing a snap-fit mechanism;

20       Figure 14 is a cross-sectional view of the filter retrieval device of Figure 13, wherein the device is advanced at least in part over the filter;

Figure 15 is a cross-sectional view of another embodiment of a filter retrieval device in accordance with the present invention employing a snap-fit mechanism;

Figure 16 is a cross-sectional view of the filter retrieval device of Figure 15, wherein the catheter is advanced at least in part over the filter;

Figure 17 is a cross-sectional view of a filter retrieval device in accordance with yet another embodiment of the present invention, wherein the device is in a first position advanced to a distal protection filter;

Figure 18 is a cross-sectional view of the filter retrieval device of Figure 17,  
5 wherein the device is in a second position attached to the filter;

Figure 19 is a cross-sectional view of the filter retrieval device of Figure 17, wherein the device is in a third position fully advanced over the filter;

Figure 20 is a cross-sectional view of a guide catheter, filter wire and distal protection filter disposed within a body lumen;

10 Figure 21 is a cross-sectional view illustrating a second step of advancing and attaching a dilator to the filter;

Figure 22 is a cross-sectional view illustrating a third step of advancing an outer sheath along the guidewire and dilator and collapsing the filter therein;

Figure 23 is a cross-sectional view of guide catheter, filter wire and distal  
15 protection filter disposed within a body lumen;

Figure 24 is a cross-sectional view illustrating a second step of advancing and attaching a dilator to the filter;

Figure 25 is a cross-sectional view illustrating a third step of advancing an outer sheath along the guidewire and dilator and collapsing the filter therein;

20 Figure 26 is a cross-sectional view illustrating a fourth step of removing the dilator, guidewire and collapsed filter from the body;

Figure 27 is a cross-sectional view illustrating a fifth step of inserting a second guidewire into the patient through the guide catheter and outer sheath.



### Detailed Description of the Invention

Referring now to the drawings wherein like reference numerals refer to like elements throughout the several views, Figure 1 is a cross-sectional view of a filter retrieval catheter 10 in accordance with the present invention. Filter retrieval catheter 10 includes an outer shaft 14 and a generally cylindrical distal sheath 12 extending distally thereof. Distal sheath 12 defines a lumen 40 adapted to contain an intravascular filter such as the distal protection filter 22 shown in Figure 1, once collapsed.

As shown in Figure 1, catheter 10 has been advanced along a filter wire 20 to filter 22 disposed at the distal end of filter wire 20. Filter wire 20 includes a distal tip 24 which can be a spring tip. A filter stop 26 is disposed on filter wire 20 proximate and proximal the filter 22. Although the particular distal tip 24 shown in Figure 1 is substantially straight, an arcuate or "J" shaped distal tip (not shown) can be utilized to facilitate steering and tracking during advancement of filter wire 20 through the body.

Catheter 10 further includes an inner shaft 16 disposable at least in part within lumen 40 formed by distal sheath 12. Inner shaft 16 exits catheter 10 proximally at opening 18. In the particular embodiment shown in Figure 1, inner shaft 16 has a length substantially shorter than the length of outer shaft 14 to enable single operator advancement of catheter 10 within the body.

Also disposed within distal sheath 12 is a dilator tip 28 and a spring coil 30. Dilator tip 28 has a generally circular cross section and conical-shaped distal end. Dilator tip 28 is biased at least in part out of the distal end of distal sheath 12 by spring coil 30. In the particular embodiment shown in Figure 1, the proximal end of

spring coil 30 is bonded to a portion of inner shaft 16. The distal end of spring coil 30, in turn, is bonded to dilator tip 28 at a distal bonding region 32.

In use, for example, filter 22 is positioned in a body vessel distally of a location where a therapeutic device is to be used. In an application, filter 22 can be positioned distally of a coronary lesion. A therapeutic device such as an angioplasty catheter can be advanced over filter wire 20 to the lesion. Coronary angioplasty can be performed by the angioplasty catheter and debris dislodged by the procedure can be captured in filter 22. The angioplasty catheter can then be withdrawn. Catheter 10 can then be advanced over filter wire 20 until dilator tip 28 contacts filter stop 26. Catheter 10 can then be further advanced such that spring coil 30 is compressed and dilator tip 28 is drawn into lumen 40 of distal sheath 12. Catheter 10 is further advanced until filter 22 is disposed at least in part within distal sheath 12, as shown in Figure 2. Then catheter 10, filter wire 20, filter 22 and the collected debris can then be removed from the vessel lumen.

In an alternative embodiment to that shown in Figures 1-2, a filter retrieval device having an inner shaft with a length substantially similar to the length of the outer shaft may be utilized. For example, in the particular embodiment shown in Figure 3, the proximal end of inner shaft 116 terminates at or near the proximal end of outer shaft 114. Openings 142 and 118 are provided on inner shaft 116 and outer shaft 114, respectively, to permit single operator advancement of the catheter. As with the previous embodiment, a spring coil 130 is bonded to a portion of inner shaft 116, and to bonding region 132 on dilator tip 128.

A locking hub 144 disposed at or near the proximal end of the catheter is further provided to prevent relative motion between inner shaft 116 and outer shaft

114. Locking hub 144 may be attached to the inner and outer shafts by adhesive, solder or other attachment means, or by a releasable lock mechanism (not shown).

To retrieve the filter 22, outer shaft 114 is locked to inner sheath 116 by locking hub 144. Catheter 110 is advanced to a desired site in the body proximate and proximal filter 22. The catheter is then further advanced until dilator tip 128 attaches to filter stop 26. Once attached to filter stop 26, dilator tip 128 is retracted proximally, causing filter 22 to collapse at least in part within lumen 140 formed by distal sheath 112, as shown in Figure 4.

Figure 5 is a cross-sectional view of another embodiment of a filter retrieval device in accordance with the present invention. Catheter 210 includes a generally cylindrical distal sheath 212 and an outer shaft 214 extending proximally therefrom. Outer shaft 214 includes a side opening 218 to enable single operator advancement of catheter 210 within the body. A dilator tip 228 is disposable at least in part within the lumen 240 formed by distal sheath 212.

As shown in Figure 5, Dilator tip 228 is biased at least in part distally from distal sheath 212 by a spring coil 230. The distal end of spring coil 230 can be bonded to dilator tip 228 at a dilator bonding region 232. A tapered portion 236 disposed on the catheter prevents spring coil 230 from retracting proximally from distal sheath 212, when actuated.

Catheter 210 is used in a manner similar to that of catheters 10 and 110. For example, as illustrated in Figure 6, filter 22 can be collapsed and drawn into distal sheath 212 in a manner similar to that shown and described with respect to Figures 2 and 4.

Figure 7 is a plan view of another exemplary embodiment of the present invention employing a plunger assembly. Catheter 310 includes a distal sheath 312

and an outer shaft 314 extending proximally therefrom. A dilator tip 328 and spring coil 330 are disposed within the distal sheath 312, similar to the embodiment shown in Figures 5-6.

5 An inner shaft 316 having a proximal end 346 and a distal end 348 is disposed within outer shaft 314 and distal sheath 312. The distal end 348 of inner shaft 316 may be attached to the proximal end of dilator tip 328 by adhesive or other attachment means.

10 Catheter 310 further includes a plunger assembly comprising a tubular member 352 defining a lumen 350, and a plunger 354 formed by enlarged diameter portion on the proximal end 346 of inner shaft 316. Plunger 354 is adapted to slide along filter wire 20 within lumen 350 formed by tubular member 352. A shaft 356 extending proximally from tubular member 352 is further disposed in part within lumen 350. A distal section 358 of shaft 356 is crimped in a smiley-face configuration to permit the filter wire 20 to exit catheter 310 through opening 360, 15 and to act as a proximal stop for plunger 354. The proximal end of outer shaft 314, which extends proximally into lumen 350 formed by tubular member 352, is adapted to act as a distal stop for plunger 354.

In use, spring coil 330 biases the dilator tip 328 at least in part distally from distal sheath 312. To retrieve the filter, catheter 310 is advanced to a point along the 20 filter wire 20 proximate and proximal filter stop 26. Catheter 310 is further advanced until dilator tip 328 attaches to filter stop 26. Once attached, filter wire 20 is retracted proximally, causing plunger 354 to slide proximally within tubular member 352, and filter 22 to collapse at least in part within distal sheath 312, as shown in Figure 8. The crimped distal end 362 of shaft 356 acts as a proximal stop for plunger 354. When 25 plunger 354 abuts distal end 362, the operator is prevented from retracting filter 22

further into distal sheath 312, thus providing the operator with tactile feedback that filter 22 is collapsed within distal sheath 312.

Figure 9 illustrates another exemplary embodiment in accordance with the present invention. In the particular embodiment shown in Figure 9, spring coil 430 is disposed within tubular member 452 proximal an inner shaft 416. Inner shaft 416 has a proximal end 446 and a distal end 448. An enlarged diameter portion disposed on the proximal end 446 of inner shaft 416 forms a plunger 454. The distal end 448 of inner shaft 416 is attached to dilator tip 428.

Spring coil 430 is adapted to bias the dilator tip 428 distally from distal sheath 412. As with the embodiment illustrated in Figures 8-9, the crimped distal end 462 of shaft 456 is adapted to hold spring coil 430 in partial compression, and to prevent spring coil 430 from retracting proximally.

To retrieve the filter, catheter 410 is advanced along the filter wire 20 until dilator tip 428 contacts filter stop 26. Further advancement of catheter 410 causes the filter 22 to collapse within the lumen 440 of distal sheath 412, as shown in Figure 10. Then the catheter containing filter wire 20, filter 22 and the debris can be removed from the body.

Figures 11 and 12 are cross-sectional views of a filter retrieval device in accordance with yet another embodiment of the present invention. Catheter 510 includes a cylindrical distal sheath 512 coupled to an outer shaft 514 distally thereof. Disposable at least in part within lumen 540 of distal sheath 512 is a dilator tip 528 similar to that depicted in Figures 9-10. Dilator tip 528 is biased at least in part distally from distal sheath 512 by a spring coil 530.

Spring coil 530 is formed by a portion of a wire 560 that has a proximal end 562 and a distal end 564. The proximal end 562 of wire 560 is attached to outer shaft

514 at or near opening 518. Wire 560 is substantially straight from proximal end 562 to point 566, and is helically disposed about inner shaft 516 from point 566 to distal end 564.

In use, when catheter 530 is advanced distally, dilator tip 528 attaches to filter stop 26. Further advancement of the catheter causes filter 22 to collapse and retract at least in part into the distal sheath 512, as shown in Fig. 12.

Although the particular embodiments depicted in Figures 1-12 utilize a helically disposed spring coil to bias the dilator tip distally from the distal sheath, other configurations are possible without deviating from the scope of the invention. For example, a spring having one or more struts disposed longitudinally along the axis formed by the filter wire may be used to bias the dilator tip distally from the distal sheath. In yet another example, the spring may comprise an accordion-shaped polymeric tube adapted to bias the dilator tip distally from the distal sheath.

It is also to be understood that several different materials may be utilized to form the resilient members without deviating from the scope of the present invention. For example, the spring coil may be comprised of 304 or 316 grade stainless steel, or may be comprised of a polymeric material such as polyethylene (PE), polypropylene (PP), polyvinylchloride (PVC) or polytetrafluoroethylene (PTFE).

Figure 13 illustrates yet another exemplary embodiment of the present invention utilizing a snap-fit mechanism to retrieve the filter. Filter retrieval catheter 610 includes a distal sheath 612 coupled to a shaft 614 extending proximally therefrom. Distal sheath 612 defines a lumen 640 adapted to carry a filter such as a distal protection filter, once collapsed.

Disposable at least in part within lumen 640 is a dilator tip 628. Dilator tip 628 is comprised of a substantially hard material, and includes several recessed

surfaces adapted to permit relative motion between the dilator tip 628 and the distal sheath 612. In the particular embodiment shown in Figure 13, dilator tip 628 includes a first recessed surface 670 disposed on a proximal portion of dilator tip 628, and a second recessed surface 672 disposed distally the first recessed surface 670. The first  
5 recessed surface 670 and second recessed surface 672 are adapted to permit a reduced inner diameter portion 676 disposed on distal sheath 612 to slide thereon.

The length of the second recessed surface can be varied depending on the actuation length desired. In an application, the length of the second recessed surface can be pre-determined to provide a sufficient actuation length to permit the filter to  
10 completely collapse within the distal sheath. This pre-determined length provides the operator with feedback on the location of the filter within the distal sheath, thus obviating the need to resort to more traditional fluoroscopic imaging techniques.

To retrieve the filter, dilator tip 628 is first attached to the distal sheath 612 prior to insertion of the device into the body. In a first position shown in Figure 13,  
15 catheter 610 is inserted into the patient and advanced to the site of the filter to be retrieved. A barb 678 disposed on dilator tip 628 distal the first recessed surface 670 prevents dilator tip 628 from sliding relative to distal sheath 612 during delivery. Once catheter 610 has been advanced to the site, and the distal end of dilator tip 628 abuts filter stop 26, continued retraction of filter wire 20 and/or advancement of the  
20 catheter causes the reduced inner diameter portion 674 on the distal sheath 612 to overcome the frictional force exerted by barb 678. When this occurs, barb 678 displaces distally, allowing reduced inner diameter portion 676 to engage the second recessed surface 672. Continued retraction of reduced inner diameter portion 676 along the second recessed surface 672 draws filter 22 into delivery sheath 612, as

shown in Figure 14. Then the catheter containing the filter wire 20, collapsed filter 22 and collected debris can be withdrawn from the body.

Figure 15 is a cross-sectional view of another embodiment in accordance with the present invention. Similar to the embodiment illustrated in Figures 13-14, catheter 710 includes a distal sheath 712 coupled to a shaft 714 (not shown) extending proximally therefrom. Distal sheath 712 defines a lumen 740 adapted to carry a filter such as a distal protection filter, once collapsed.

In the particular embodiment shown in Figure 15, distal sheath 712 has a reduced inner diameter portion 776 which is adapted to slidably engage the first recessed surface 770 and second recessed surface 772 on dilator tip 728.

In use, catheter 710 operates in a manner similar to that of catheter 610. For example, as illustrated in Figure 16, filter 22 can be collapsed and drawn into distal sheath 712 in a manner similar to that shown and described with respect to Figure 14.

In a similar embodiment to that shown in Figures 13-16, a filter retrieval device having an actuatable dilator tip further comprises a third recessed surface disposed on the dilator tip to provide the operator with tactile feedback that the filter is fully drawn into the catheter. As illustrated in Figure 17, a filter retrieval catheter 810 having an actuatable dilator tip includes a distal sheath 812 coupled to a shaft 814 distally thereof, and a dilator tip 828 slidably disposable along a filter wire 20.

Dilator tip 828 includes a first recessed surface 870 disposed on a proximal portion thereof, a second recessed surface 872 disposed distally the first recessed surface 870, and a third recessed surface 874 disposed distally the second recessed surface 872. In an application, the length of the second recessed surface 872 can be pre-determined to provide a sufficient actuation length to permit the filter to completely collapse within distal sheath 812.



To retrieve the filter, dilator tip 828 is attached to the distal sheath 812 and inserted into the patient. In a first position shown in Figure 17, catheter 810 is advanced to a location proximate and proximal a filter 22. A barb 878 disposed on dilator tip 828 distal the first recessed surface 870 prevents dilator tip 828 from sliding relative to distal sheath 812 during delivery. Once catheter 810 has been advanced to the site, and the distal end of dilator tip 828 abuts filter stop 26, continued retraction of filter wire 20 and/or advancement of the catheter causes the reduced inner diameter portion 876 on distal sheath 812 to overcome the frictional force exerted by barb 878. Continued retraction of the reduced inner diameter portion 876 in the proximal direction along the second recessed surface 872 draws filter 22 into delivery sheath 812, as shown in Figure 18. A second barb 880 disposed distally of the second recessed surface 872 is then engaged. When a sufficient force is exerted on the second barb 880, barb 880 displaces, allowing reduced inner diameter portion 876 to engage the third recessed surface 874 as shown in Figure 19. When the third recessed surface 874 is engaged, continued retraction of dilator tip 828 is prevented, thus informing the operator that filter 22 has been fully encapsulated within distal sheath 812.

Referring now to Figures 20-27, methods for retrieving an intravascular filter from a body lumen will now be described. As shown in Figure 20, a guide catheter 910 having a flared distal end 982 is inserted into the lumen of a patient. A guidewire 20 is inserted through the guide catheter, and is advanced to a desired site within the patient. An intravascular filter 22 such as a distal protection filter is then advanced along guidewire 20 and placed at or near the distal end thereof. In an application, filter 22 is advanced to a location distal a lesion to collect debris dislodged during a therapeutic procedure such as an angioplasty or atherectomy.

To retrieve filter 22 from the body lumen, a dilator tip 928 is advanced by means of a pushing member 984 along filter wire 20 through guide catheter 910 to a point proximate and proximal filter 22. As shown in Figure 21, the physician then further advances dilator tip 928 until it attaches to filter stop 26. Once dilator tip 928 is attached to filter stop 26, an outer sheath 992 is advanced along filter wire 20 and dilator tip 928 over filter 22, causing the filter to collapse within the outer sheath as shown in Figure 22. Then, the dilator tip 928, filter wire 20, filter 22 and collected debris can be removed from the body.

Figures 23-27 illustrate an alternative method for retrieving an intravascular filter in accordance with the present invention wherein a second guidewire is placed within the body. As shown in Figure 23, a guidewire is inserted into guide catheter 910, and is advanced to a desired location within the body where the procedure is to be performed. Disposed at or near the distal end of guidewire 20 is a filter 22.

Retrieval of the filter 22 from the body lumen proceeds in a manner similar to that illustrated in Figures 20-22. A dilator tip 928 is advanced along guidewire 20 by means of a pushing member 984 to a point proximate and proximal filter stop 26. Continued advancement causes the dilator tip 928 to attach to filter stop 26.

As shown in Figure 24, once dilator tip 928 is attached to the filter stop 26, an outer sheath 992 is advanced along guidewire 20 to a point distal the proximal end of filter 22, causing the filter to collapse in part within the outer sheath. The flanged portion 982 disposed on the distal end of guide catheter 910 is adapted to prevent the proximal end of outer sheath 992 from exiting the guide catheter 910 distally.

Outer sheath 992 defines a lumen adapted to carry filter 22 in a collapsed state. A marking band (not shown) disposed about a distal portion of outer sheath 992

permits the operator to fluoroscopically judge the location of the outer sheath within the body.

Once filter 22 has been drawn into outer sheath 992, the dilator 928, filter wire 20, filter 22 and collected debris can be retracted through outer sheath 992 and guide catheter 910 and removed from the patient, as shown in Figure 26. A second guidewire 920 can be inserted through guide catheter 910 and outer sheath 992 to the site, as shown in Figure 27.

Having thus described the embodiments of the present invention, those of skill in the art will readily appreciate other alternative embodiments that may be employed which fall within the scope of the claims attached hereto. Numerous advantages of the invention covered by this document have been set forth in the foregoing description. It should be understood that the embodiments of the present invention are exemplary only. Changes may be made in details, particularly in matters of shape, size and arrangement of parts without exceeding the scope of the invention.

What is claimed is:

1. A filter system, comprising:

a wire having a proximal end and a distal end;

a filter for collecting debris from a body lumen, said filter being disposed proximal of the distal end of said wire;

an outer shaft having a proximal end, a distal end, and a distal sheath extending distally thereof;

a dilator tip slidably disposed in the distal sheath and movable between a distally advanced position and a proximally retracted position.

2. The filter system of claim 1, wherein said dilator tip comprises a generally circular cross section and a conical shaped distal portion.

3. The filter system of claim 1, further comprising a resilient member disposed in the sheath.

4. The filter system of claim 3, wherein said resilient member comprises a spring coil.

5. The filter system of claim 3, wherein said spring comprises one or more struts longitudinally disposed along the wire.

6. The filter system of claim 1, further comprising an inner shaft disposed about the wire, said inner shaft having a proximal end and a distal end.

7. The filter system of claim 6, wherein the length of the inner shaft is substantially shorter than the length of the outer shaft.

8. The filter system of claim 6, wherein the length of the inner shaft is substantially the same as the length of the outer shaft.

9. The filter system of claim 8, further comprising a hub disposed about the proximal end of the outer shaft, said hub adapted to prevent relative motion between the inner and outer shafts.

10. The filter system of claim 6, wherein said resilient member is disposable at least in part about a portion of the inner shaft.

11. The filter system of claim 6, wherein said resilient member is disposable at least in part about a portion of the inner shaft, and wherein a portion of the resilient member is fixedly attached to a portion of the inner shaft.

12. The filter system of claim 6, further comprising a plunger assembly.

13. The filter system of claim 12, wherein said plunger assembly is attached to the proximal end of the inner shaft.

14. A filter system, comprising:

a filter wire having a proximal end and a distal end;

a filter for collecting debris from a body lumen, said filter being disposed proximal of the distal end of the filter wire;

a shaft having a proximal end, a distal end, and a distal sheath disposed at least in part distally thereof, said distal sheath having a reduced inner diameter portion; and

a dilator tip slidably disposable along the filter wire, said dilator tip having a plurality of recessed surfaces adapted to engage the reduced inner diameter portion of said distal sheath.

15. The filter system of claim 14, wherein said plurality of recessed surfaces includes:

a first recessed surface disposed on a proximal portion of the dilator tip; and

a second recessed surface disposed on the dilator tip distal said first recessed surface.

16. The filter system of claim 15, further comprising a third recessed surface disposed on the dilator tip distal said second recessed surface.

17. A device for removing an intravascular filter from a body lumen, comprising:

an outer shaft having a proximal end, a distal end, and a distal sheath extending distally thereof;

a dilator tip slidably disposable along a filter wire at least in part distally of the distal sheath; and

a resilient member disposed along the filter wire proximal the dilator tip, said resilient member adapted to bias the dilator tip toward the distal end of the distal sheath.

18. The device of claim 17, wherein said resilient member is a spring.

19. A device for removing an intravascular filter from a body lumen, comprising:

an outer shaft having a proximal end, a distal end, and a distal sheath disposed distally thereof, said distal sheath having a reduced inner diameter portion; and

a dilator tip slidably disposable along a filter wire, said dilator tip having a plurality of recessed surfaces adapted to engage the reduced inner diameter portion of said distal sheath.

20. The device of claim 19, wherein said recessed surface includes:

a first recessed surface disposed on a proximal portion of the dilator tip; and

a second recessed surface disposed on the dilator tip distal said first recessed surface.

21. The device of claim 20, further comprising a third recessed surface disposed on the dilator tip distal said second recessed surface.

22. A method for retrieving an intravascular filter from a body lumen, comprising the steps of:

providing a filter retrieval device along a filter wire to a point within a body lumen proximal a filter, said filter retrieval apparatus having a distal sheath extending distally from an outer shaft, a dilator tip slidably disposable along the filter wire, and a resilient member disposed along the filter wire proximal said dilator tip;

advancing the filter retrieval device such that said resilient member forces said dilator tip to attach to the filter and retract the filter at least in part within the distal sheath; and

removing the filter retrieval device containing the filter from the body.

23. A method for retrieving an intravascular filter from a body lumen, comprising the steps of:

providing a filter retrieval device having a distal sheath extending distally from a shaft, and a dilator tip slidably disposable along a filter wire, wherein said distal sheath has a reduced inner diameter portion adapted to engage a first recessed surface and a second recessed surface disposed on said dilator tip;

attaching the dilator tip to the distal sheath in a first position, wherein said reduced inner diameter portion is engaged along said first recessed surface;



advancing the filter retrieval device distally along the filter wire until the distal end of said dilator tip attaches to the filter,

retracting the dilator tip to a second position, wherein said reduced inner diameter portion engages said second recessed surface, and wherein said filter is disposed at least in part within the distal sheath; and

removing the filter retrieval device containing the filter from the body.

24. A method for retrieving an intravascular filter from a body lumen as in claim 23, further comprising the steps of providing a dilator tip having a third recessed surface, and further retracting the dilator tip proximally to a third position such that said reduced inner diameter portion engages said third recessed surface.

25. A method for retrieving an intravascular filter from a body lumen, comprising the steps of:

providing a guide catheter to a body lumen, said guide catheter having a flared distal portion;

inserting a filter wire through said guide catheter to a desired point within the body;

advancing an intravascular filter along the filter wire;

advancing a dilator along the filter wire until said dilator attaches to the filter;

advancing an outer sheath about the filter wire and dilator to a point distal the proximal end of the filter; and

removing the collapsed filter from the body.

26. A method for retrieving an intravascular filter as in claim 25, wherein the removal step comprises retracting the dilator proximally.

27. A method for retrieving an intravascular filter as in claim 25, wherein the removal step comprises retracting the dilator and outer sheath proximally.

28. A method for retrieving an intravascular filter as in claim 25, further comprising the step of providing a pushing member attached to the outer sheath, and advancing the outer sheath about the filter wire and dilator by means of said pushing member.

29. A method for retrieving an intravascular filter as in claim 25, further comprising the step of inserting a second wire through the guide catheter and outer sheath subsequent to removing the collapsed filter from the body

1/18

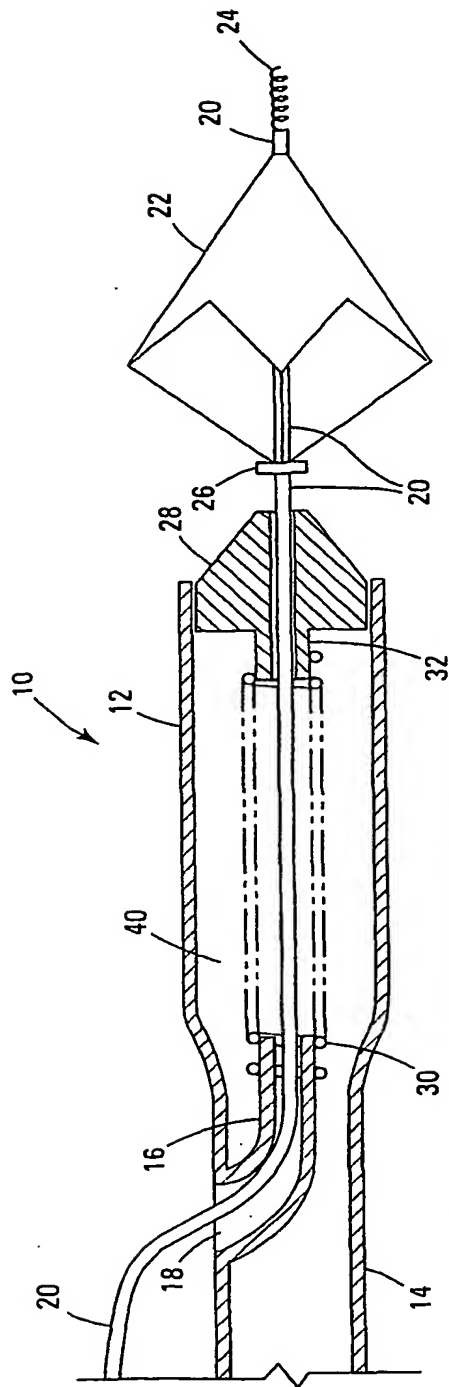


Fig. 1

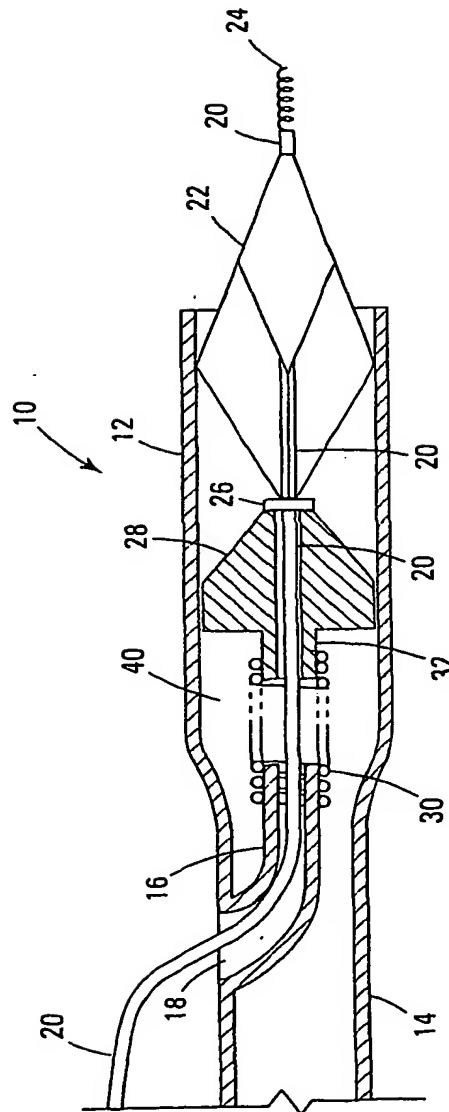


Fig. 2

2/18

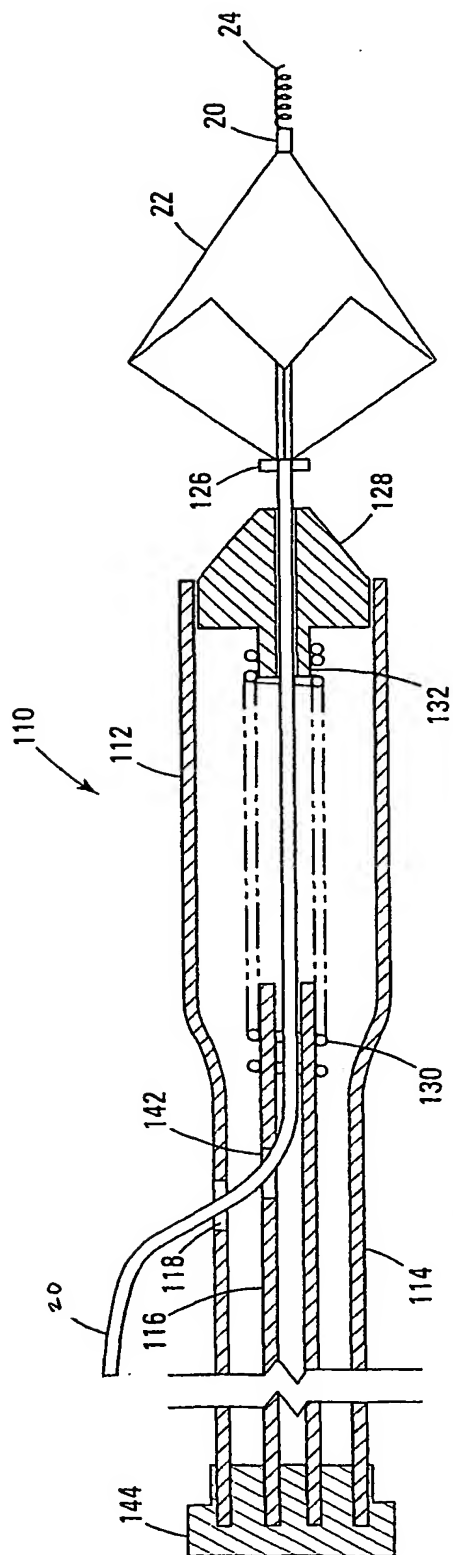


Fig. 3

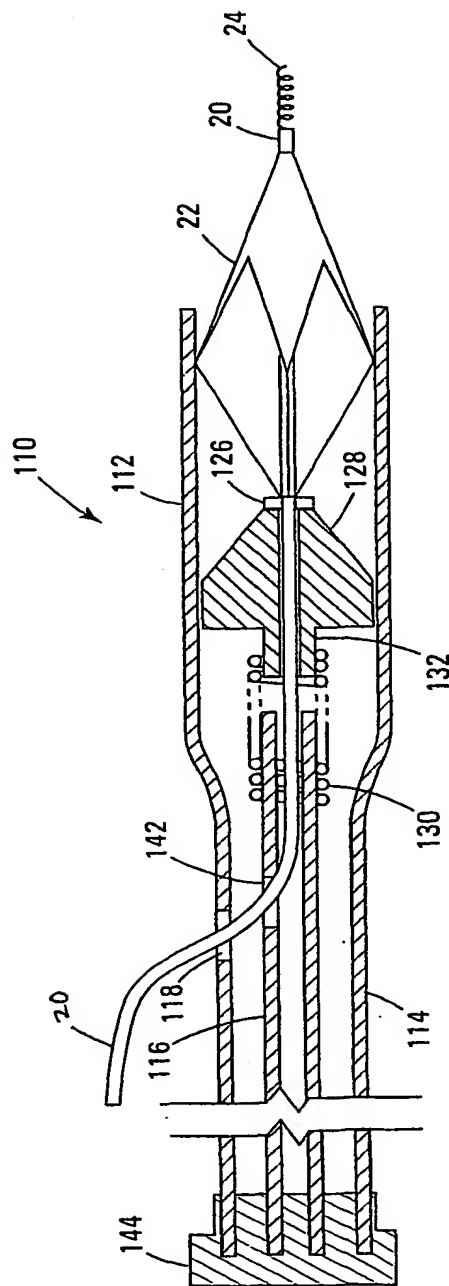


Fig. 4

3/18

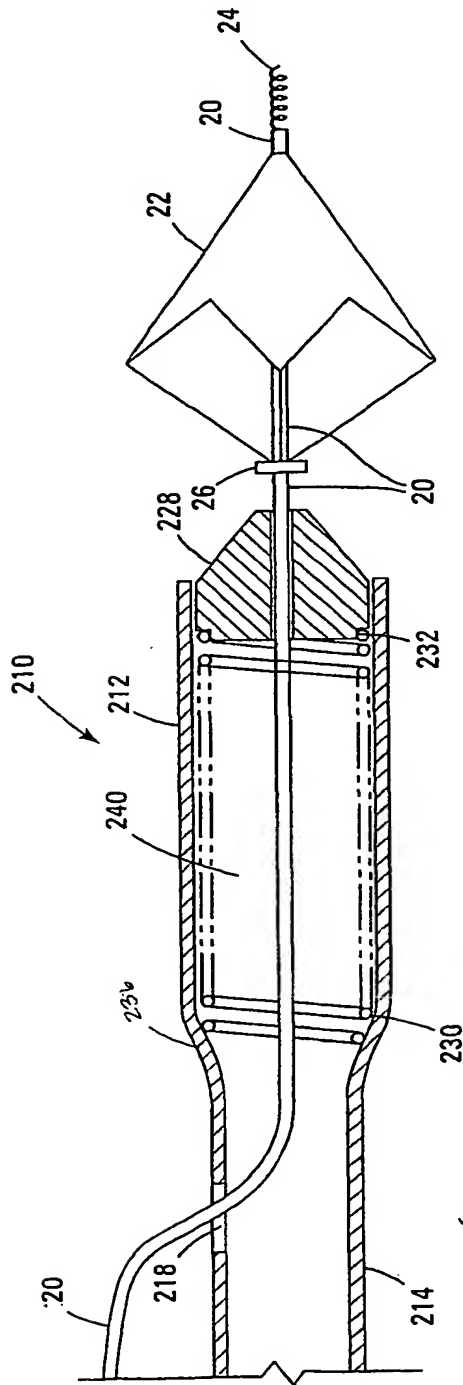


Fig. 5

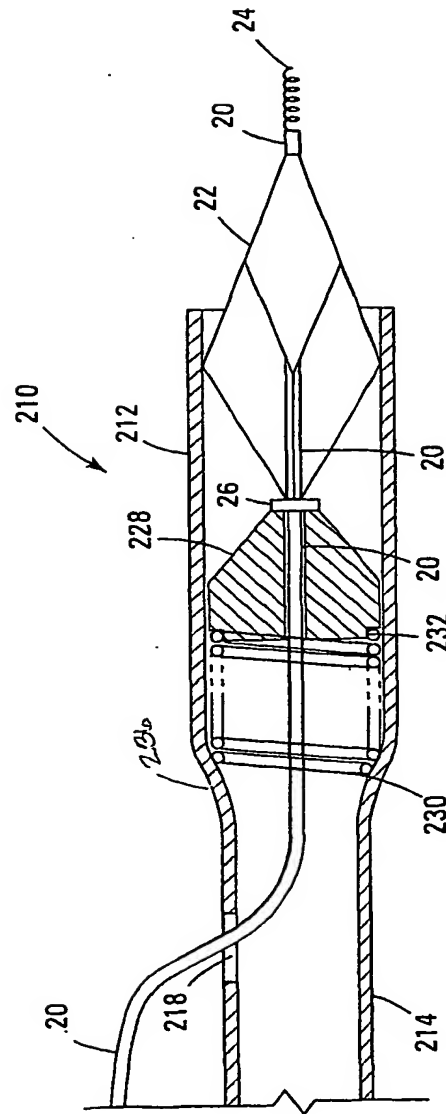


Fig. 6

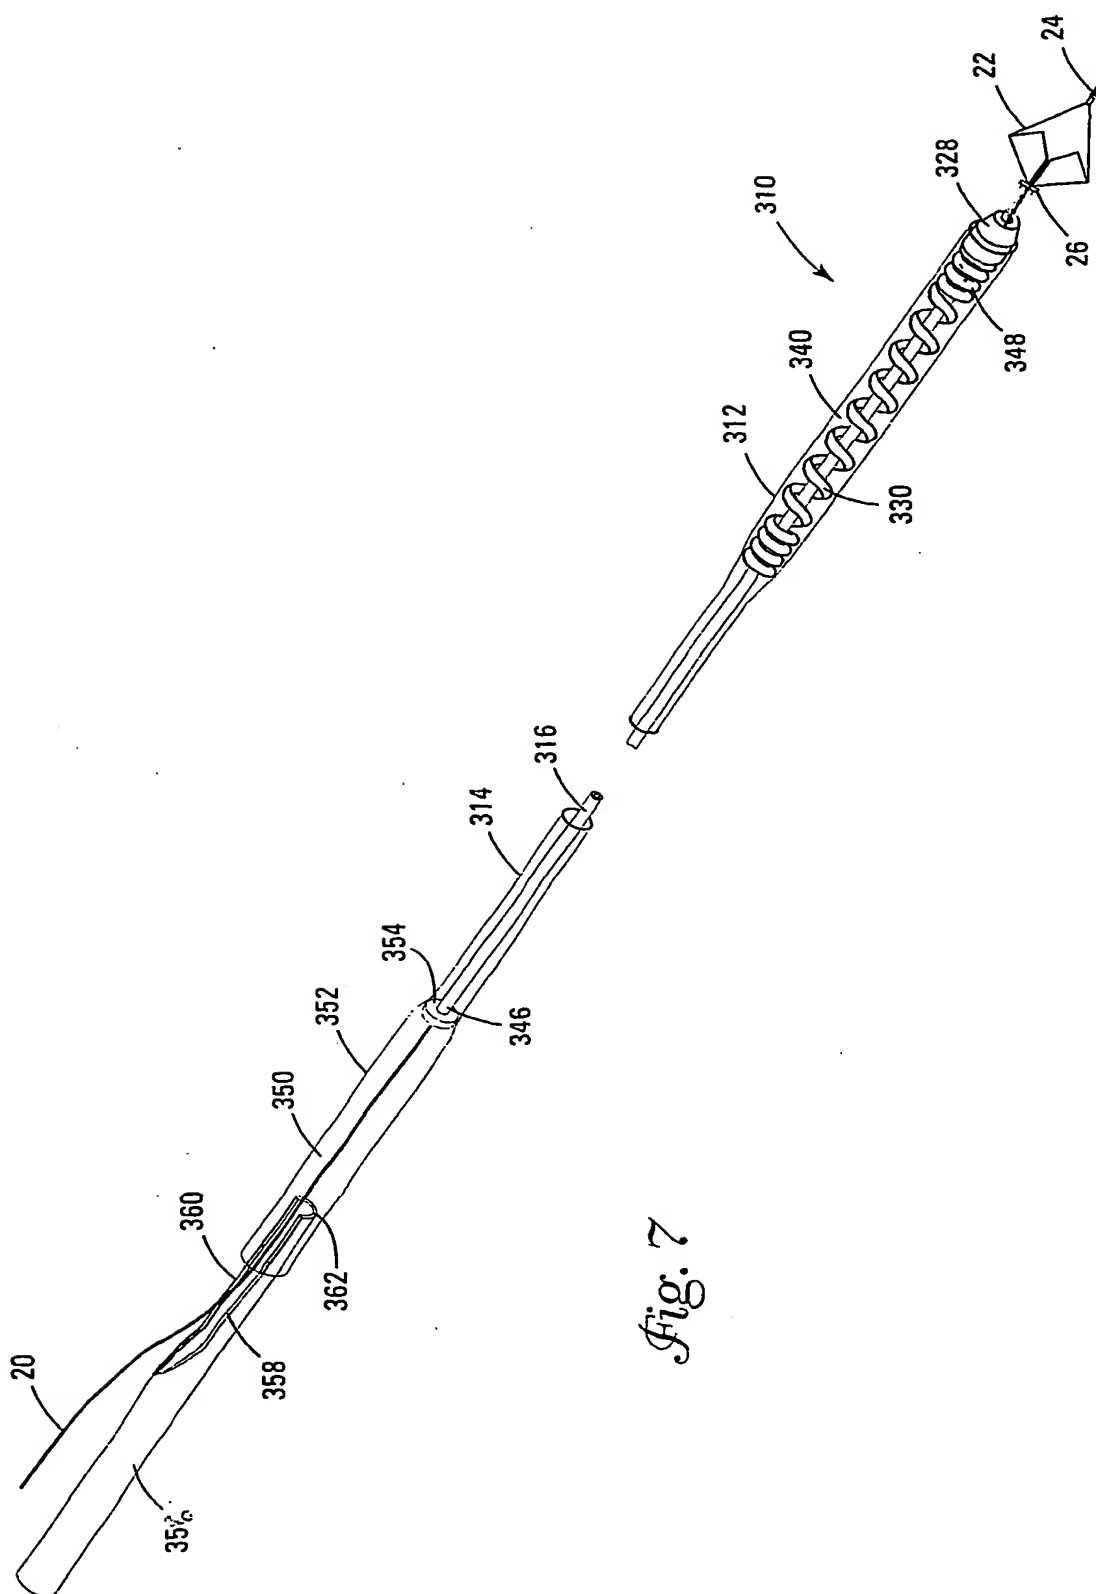


Fig. 2

5/18

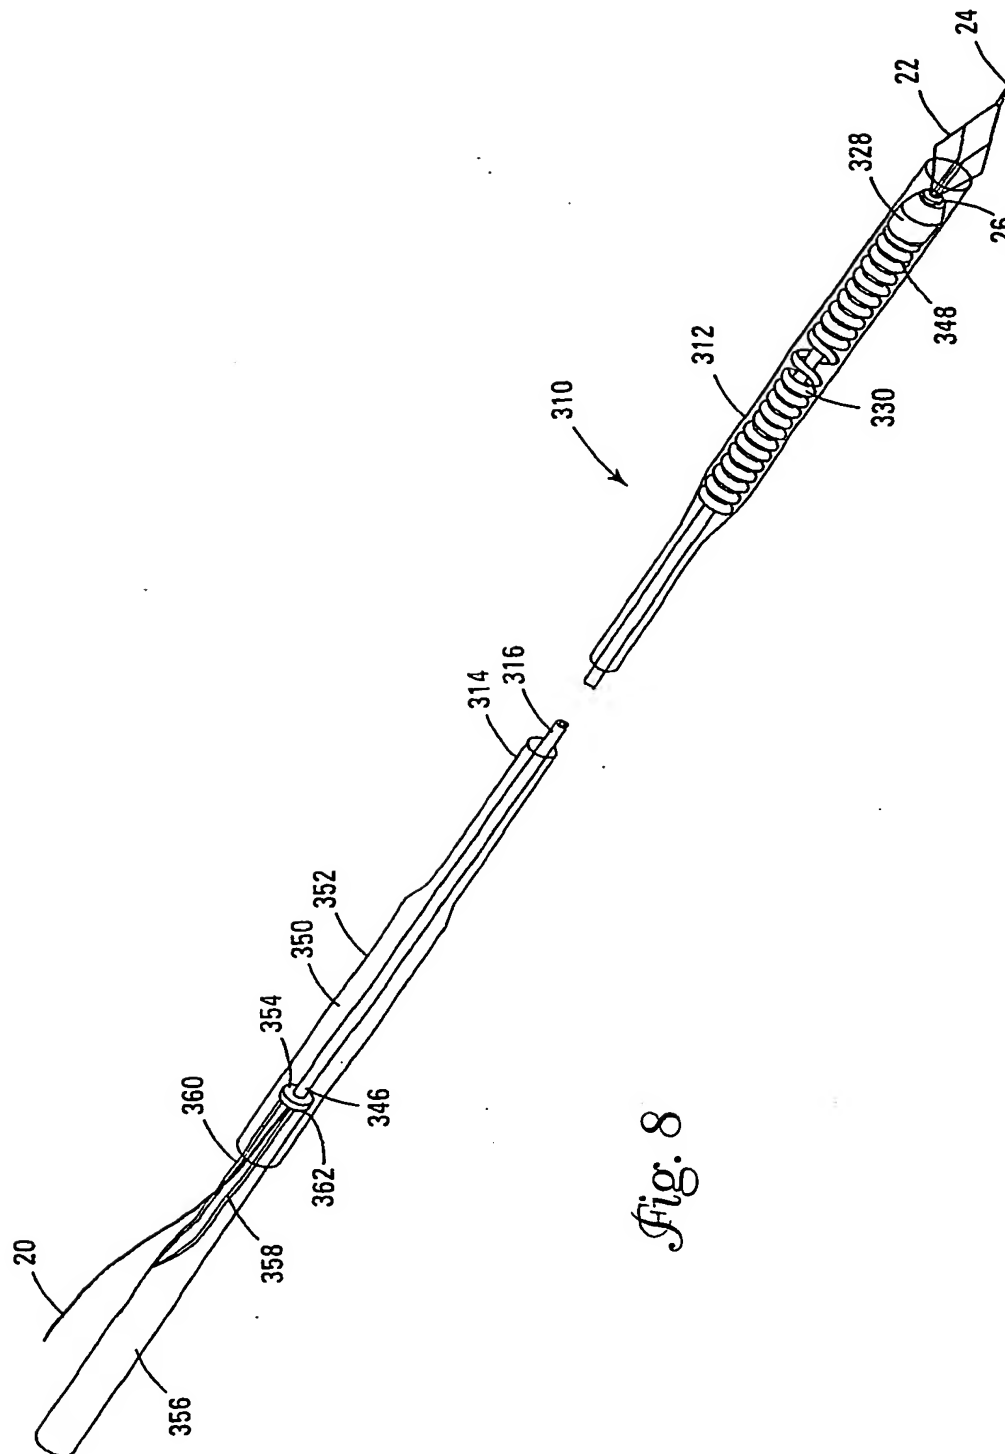


Fig. 8

6/18

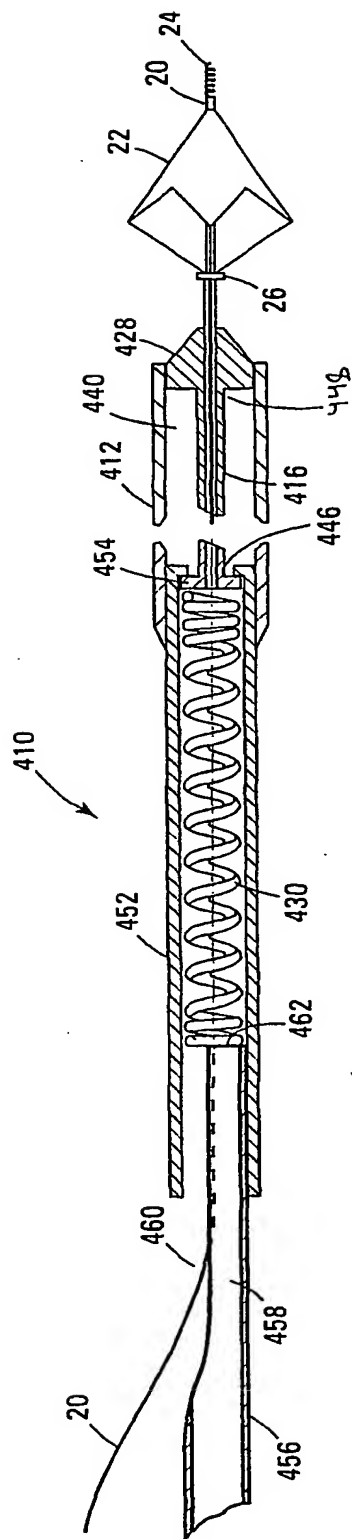


Fig. 9



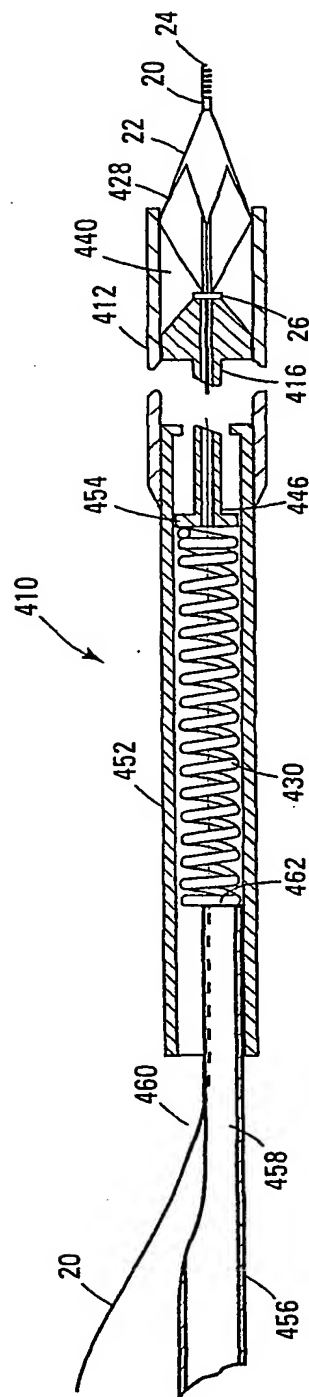




Fig. 10

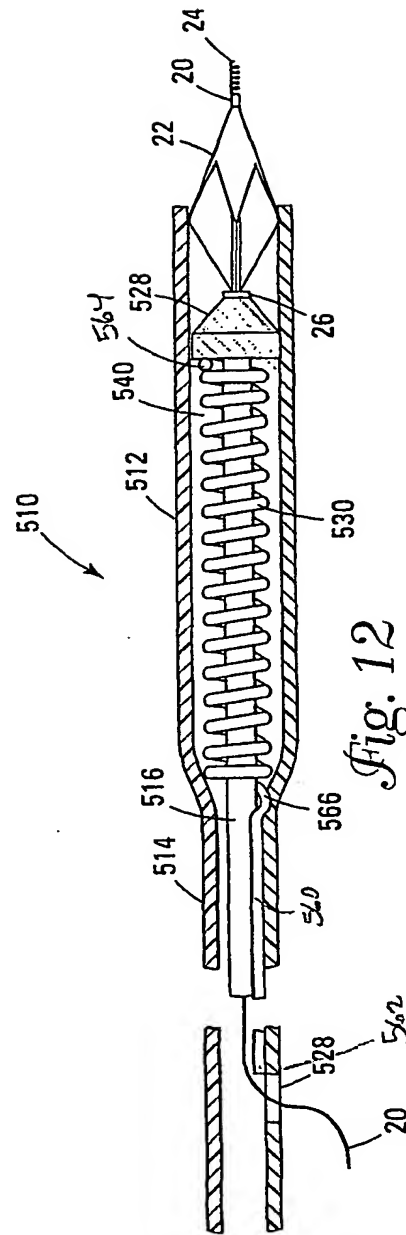

7/18

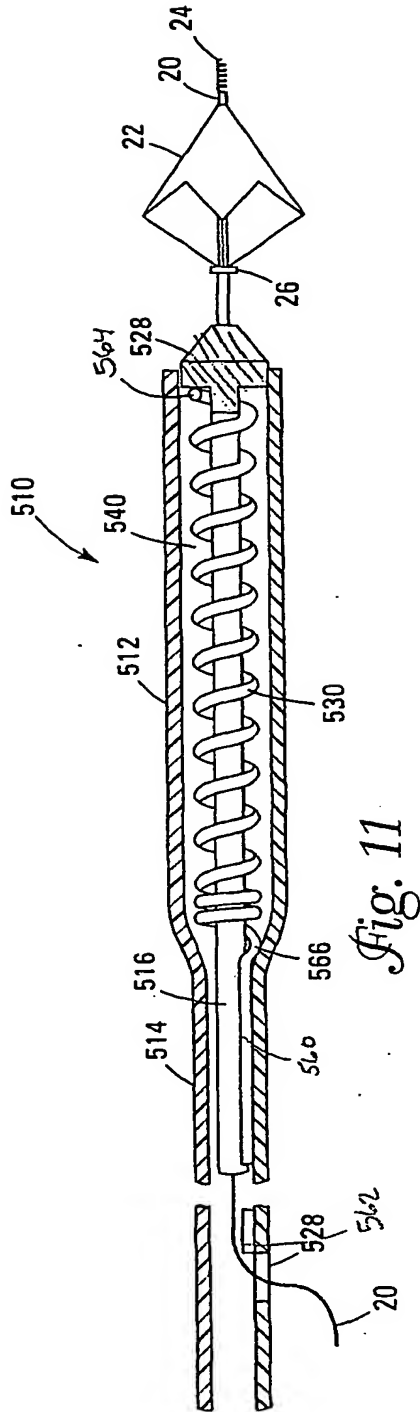

8/18

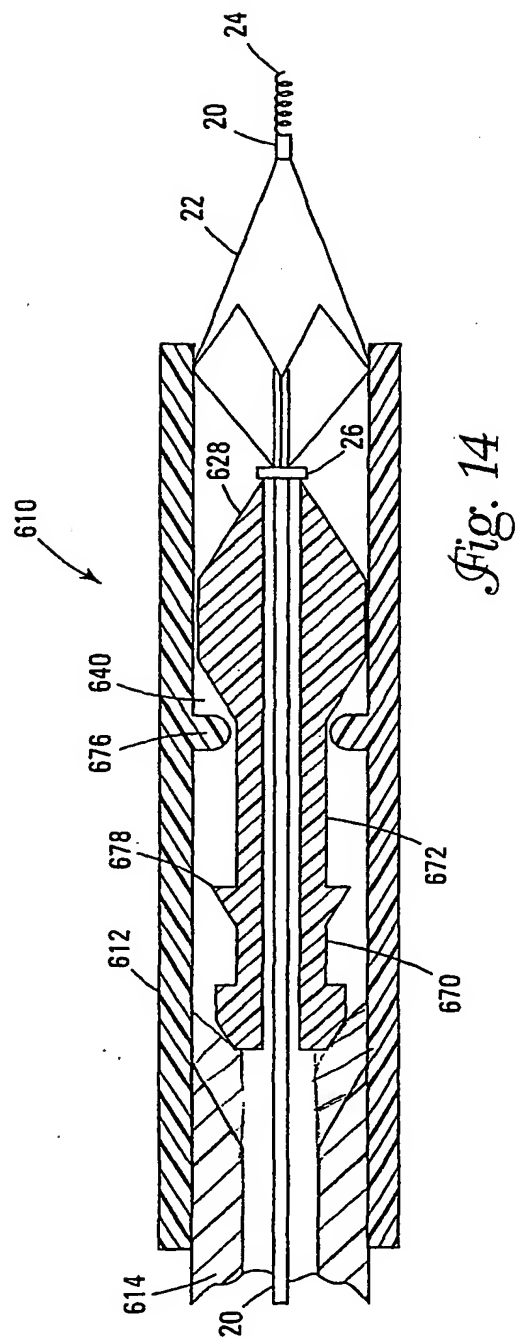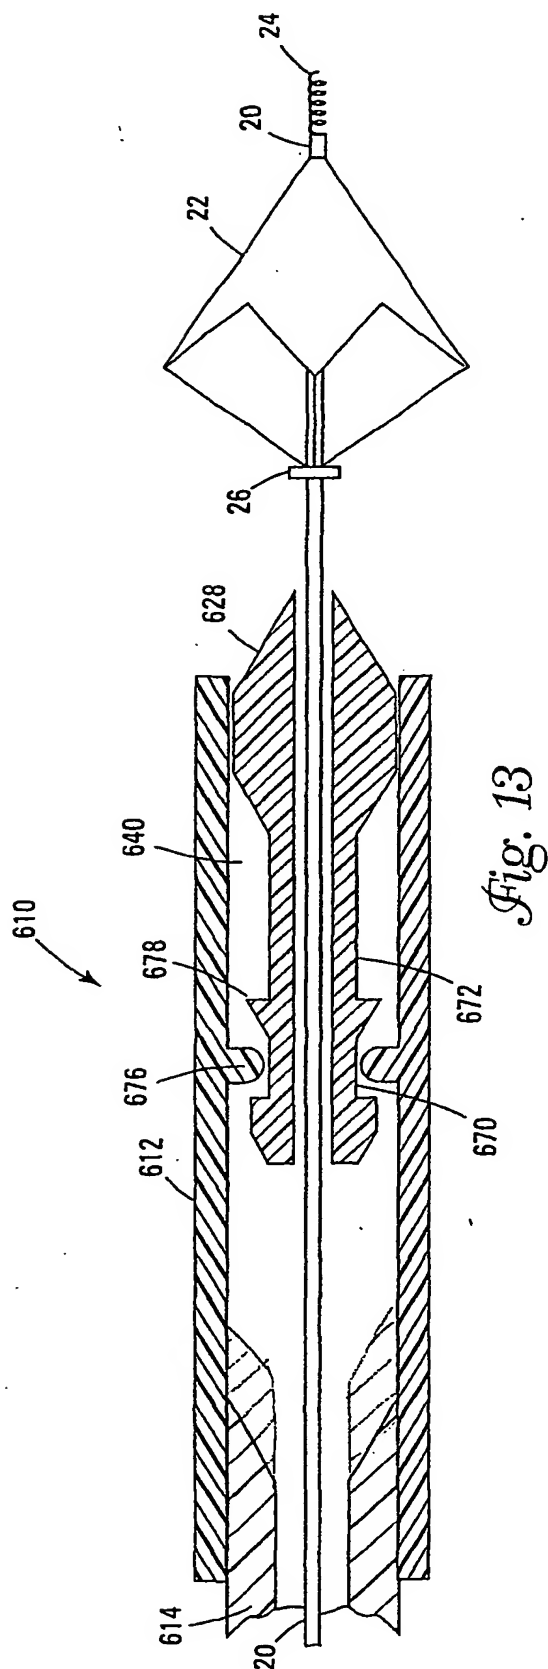

9/18

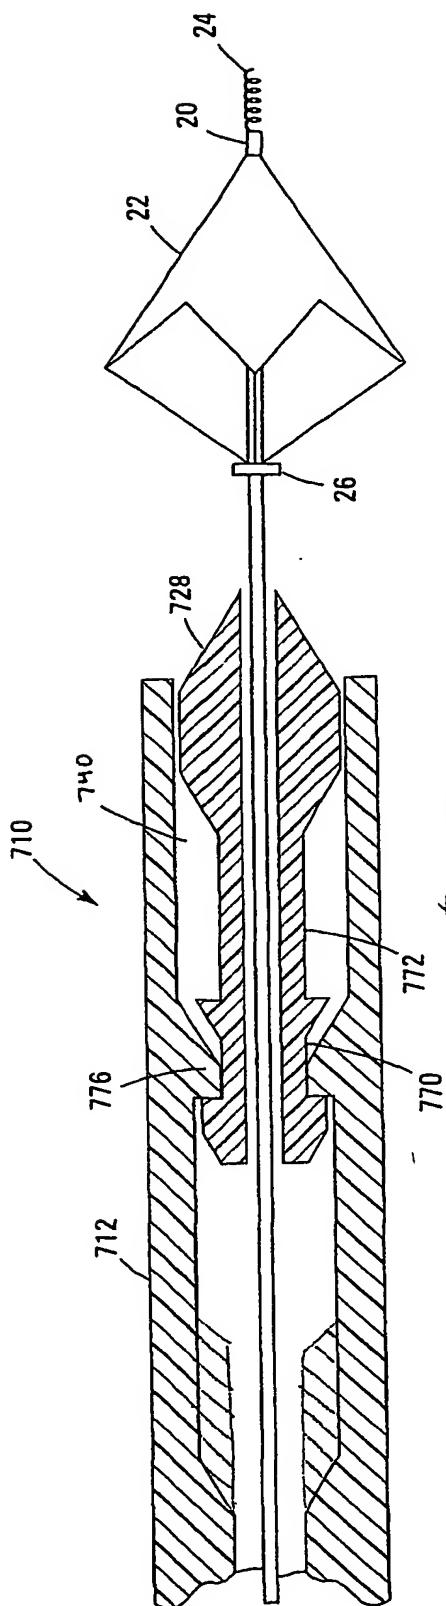


Fig. 15





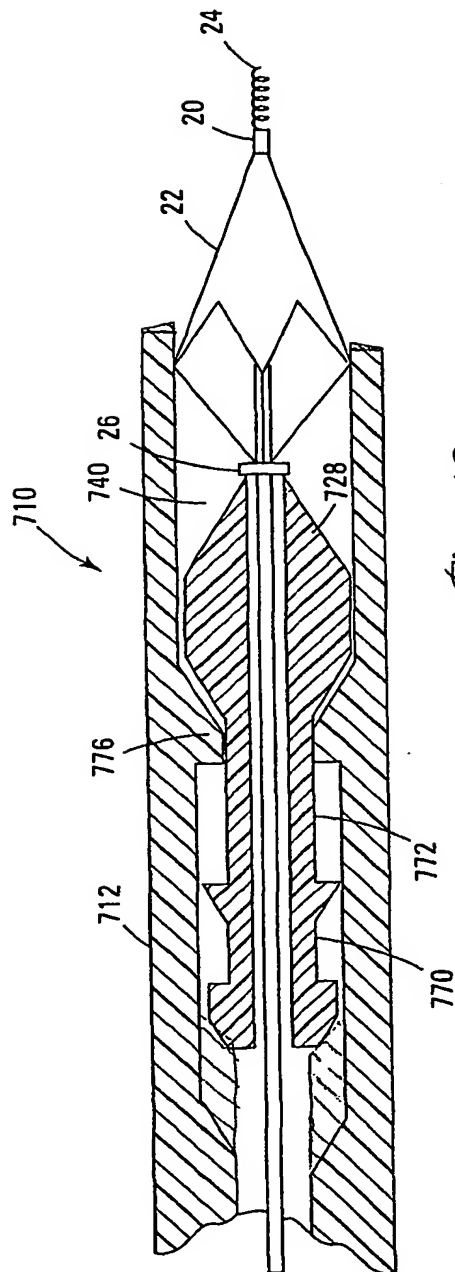



Fig. 16

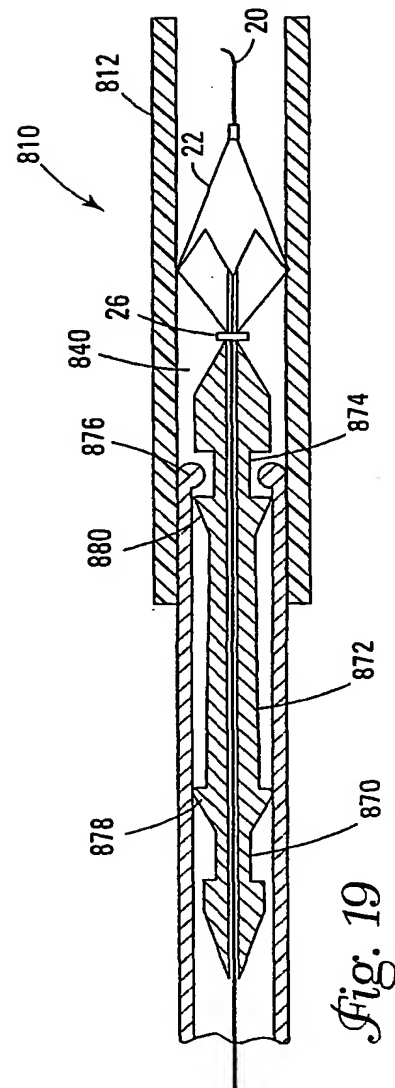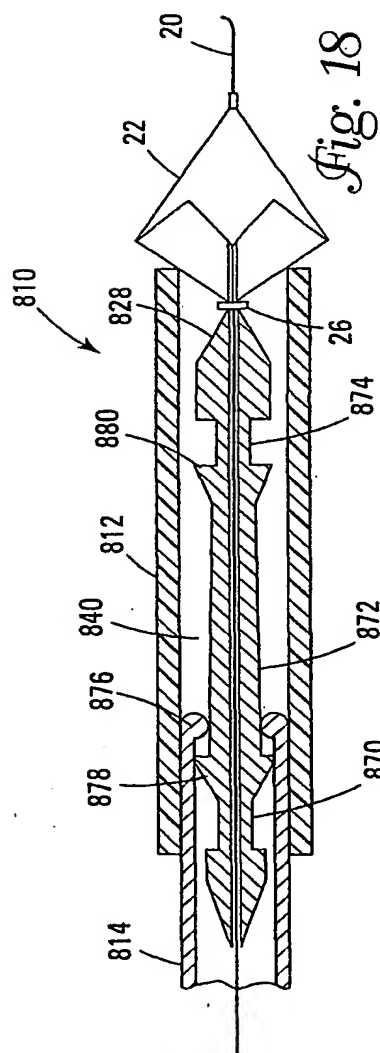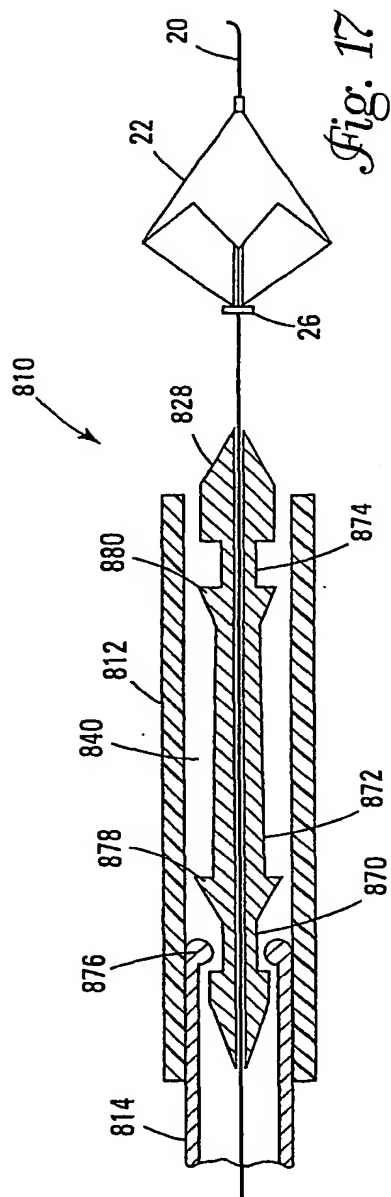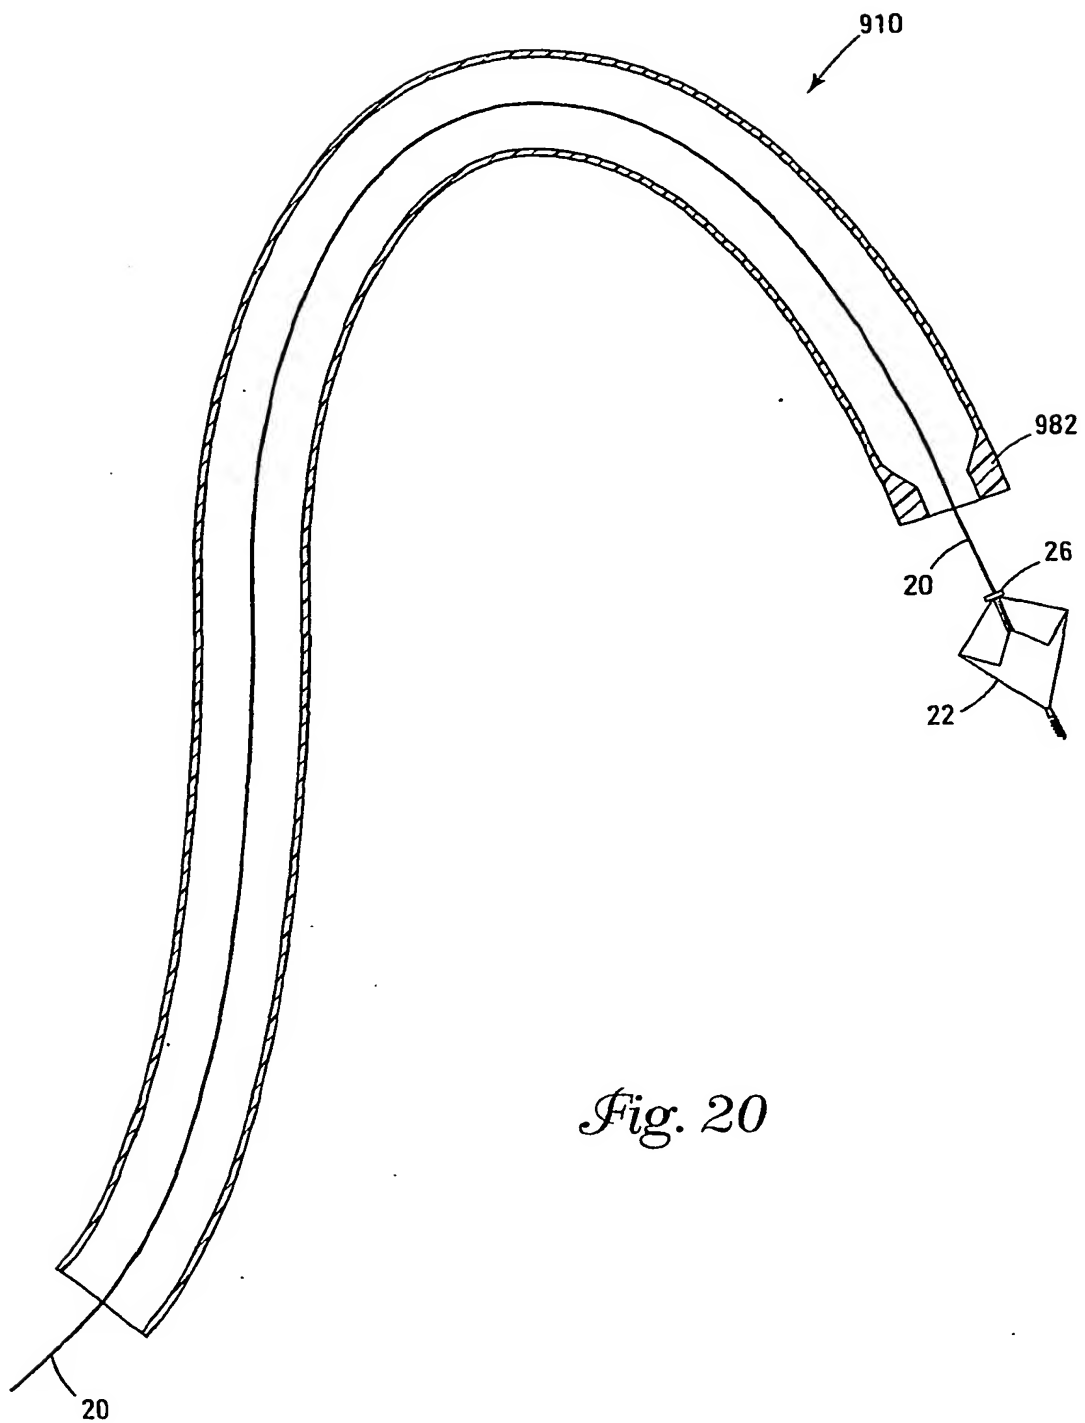

11/18


*Fig. 20*

12/18

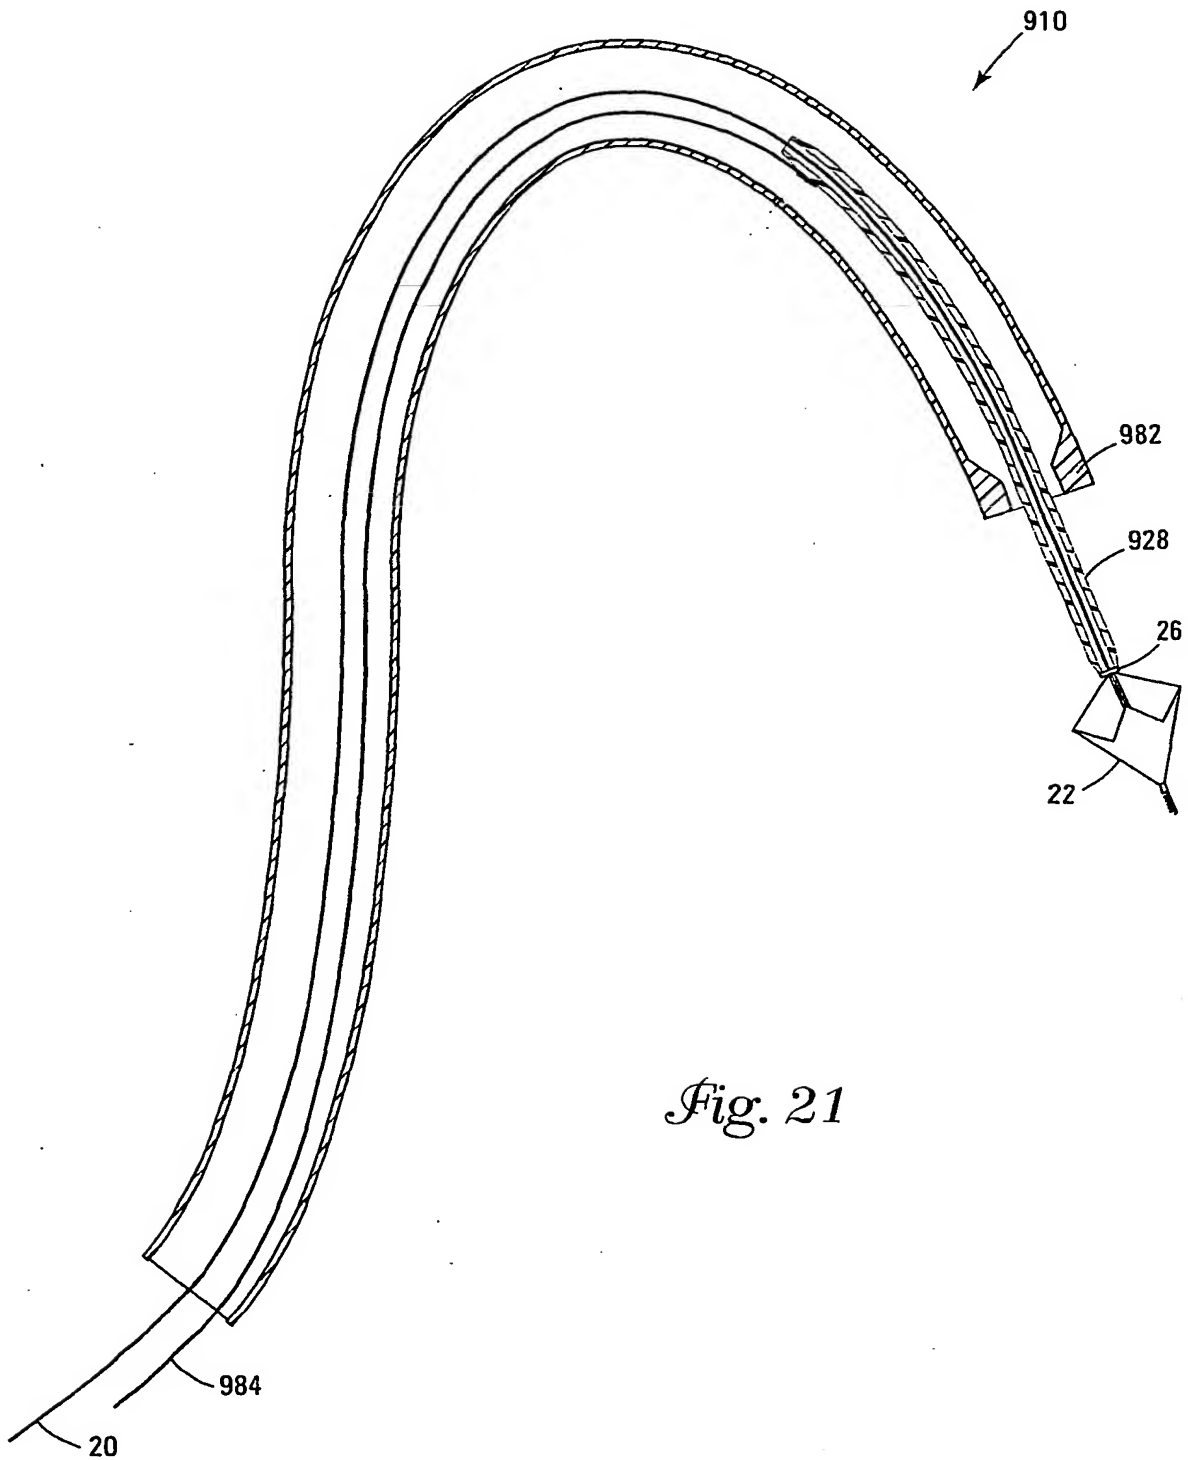


*Fig. 21*


13/18

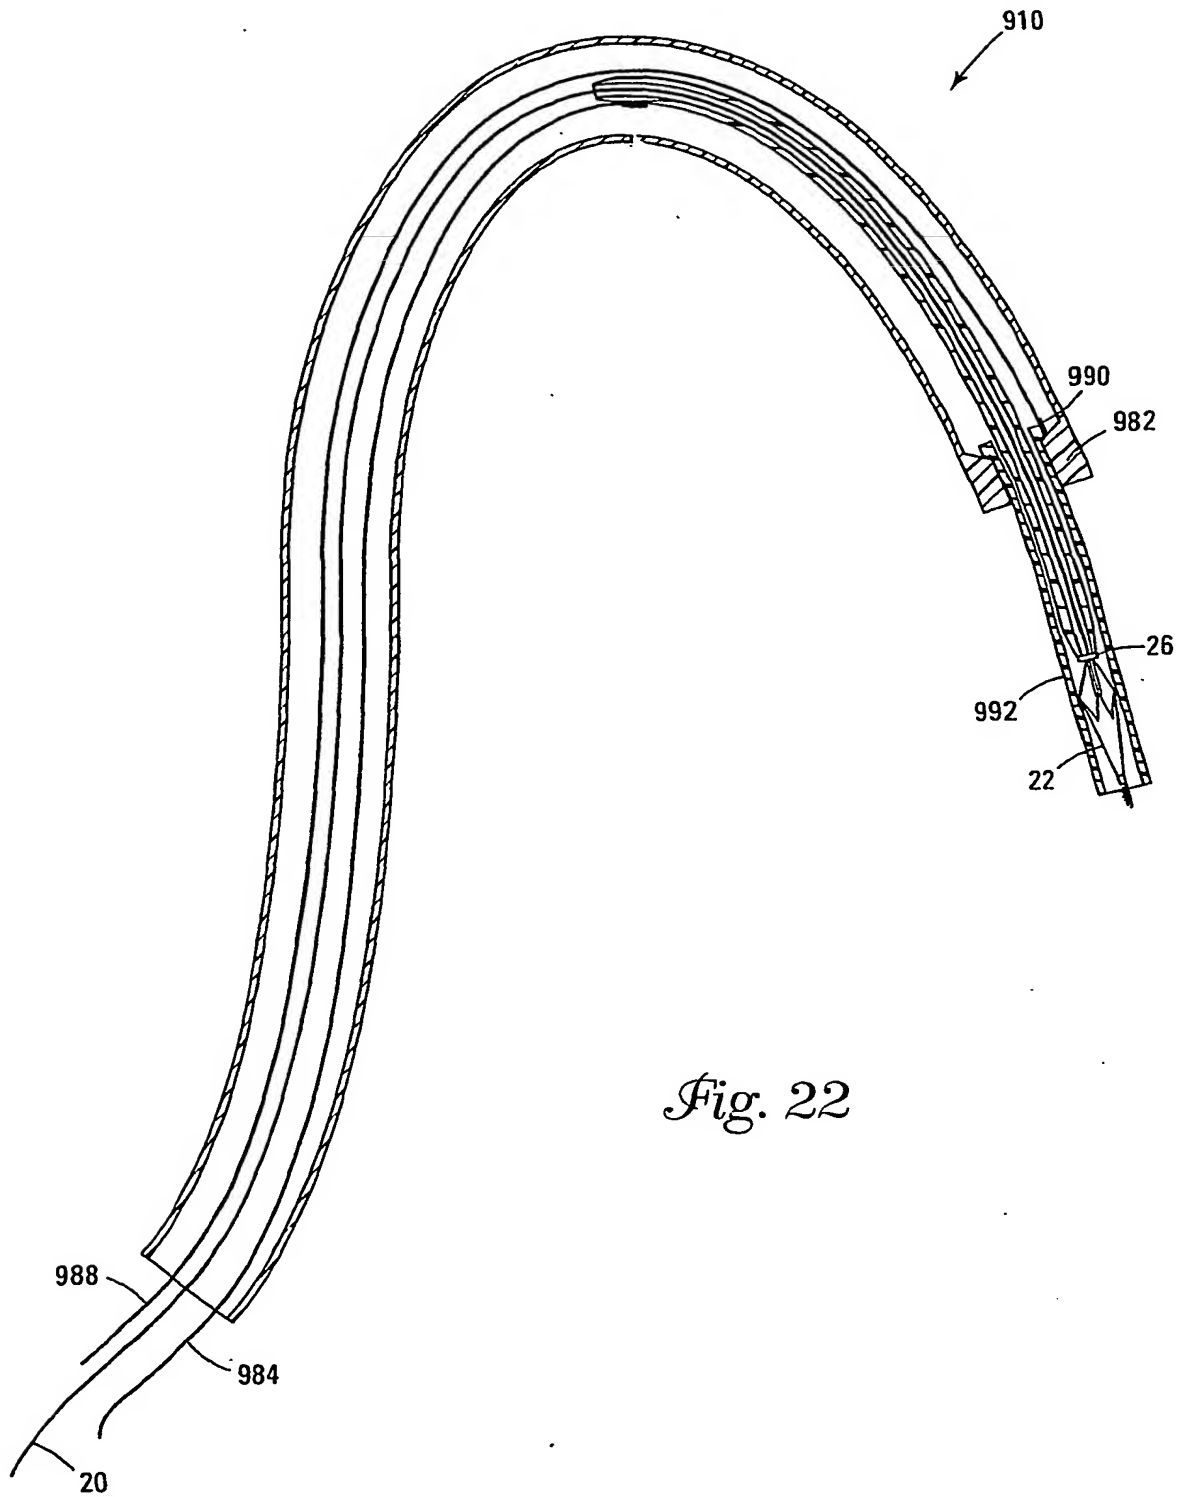


14/18

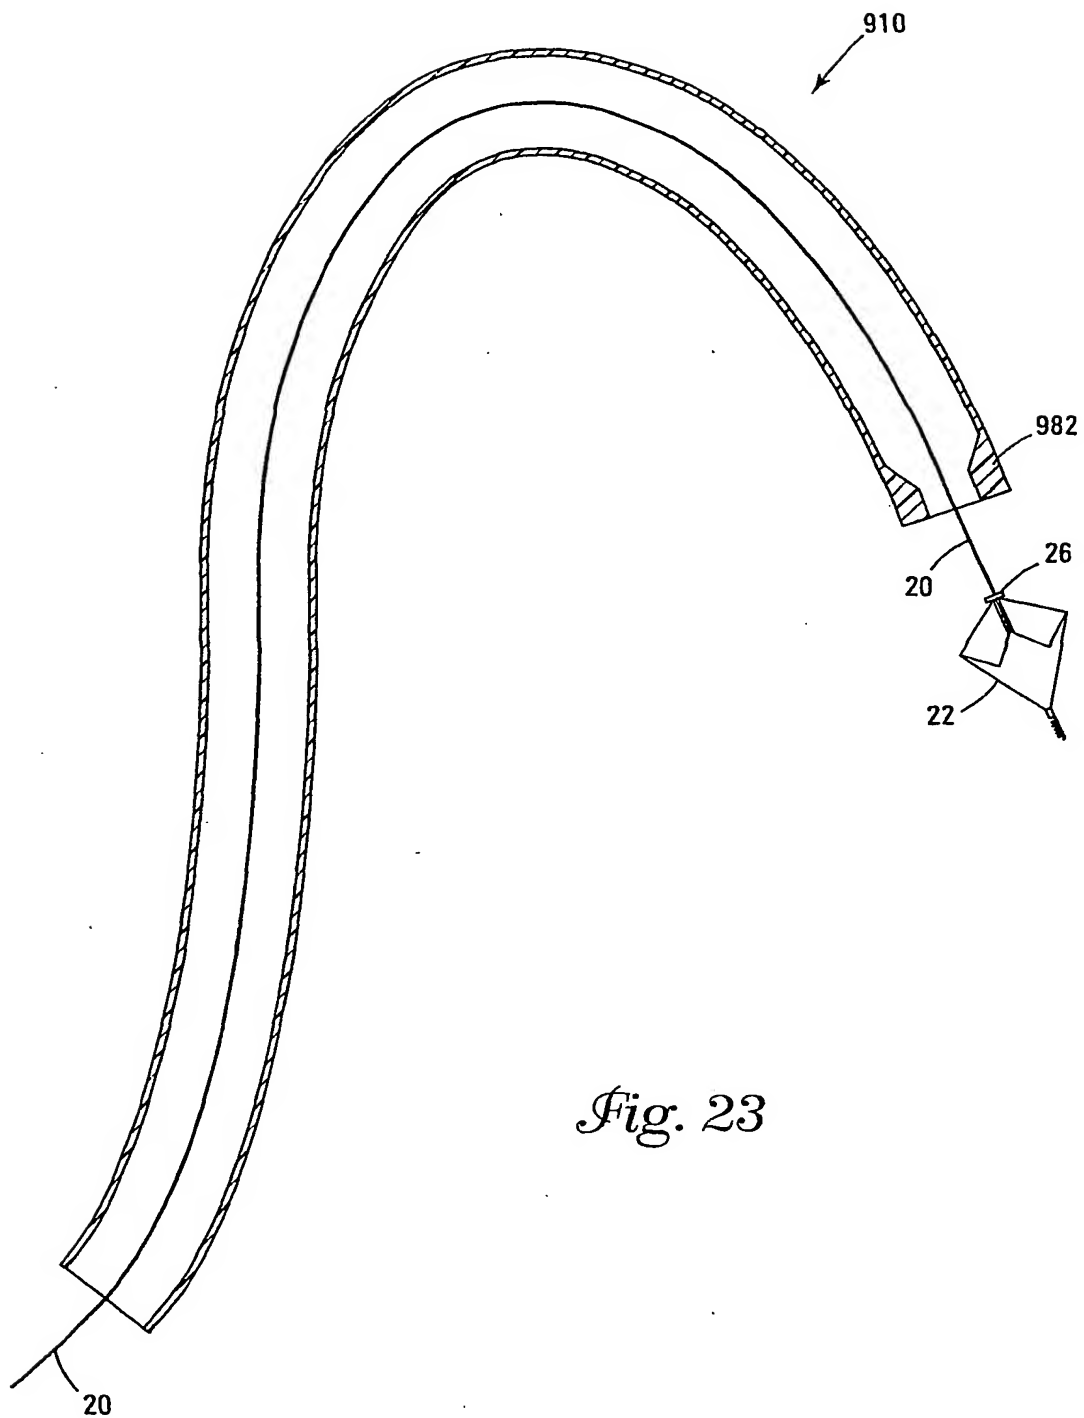*Fig. 23*



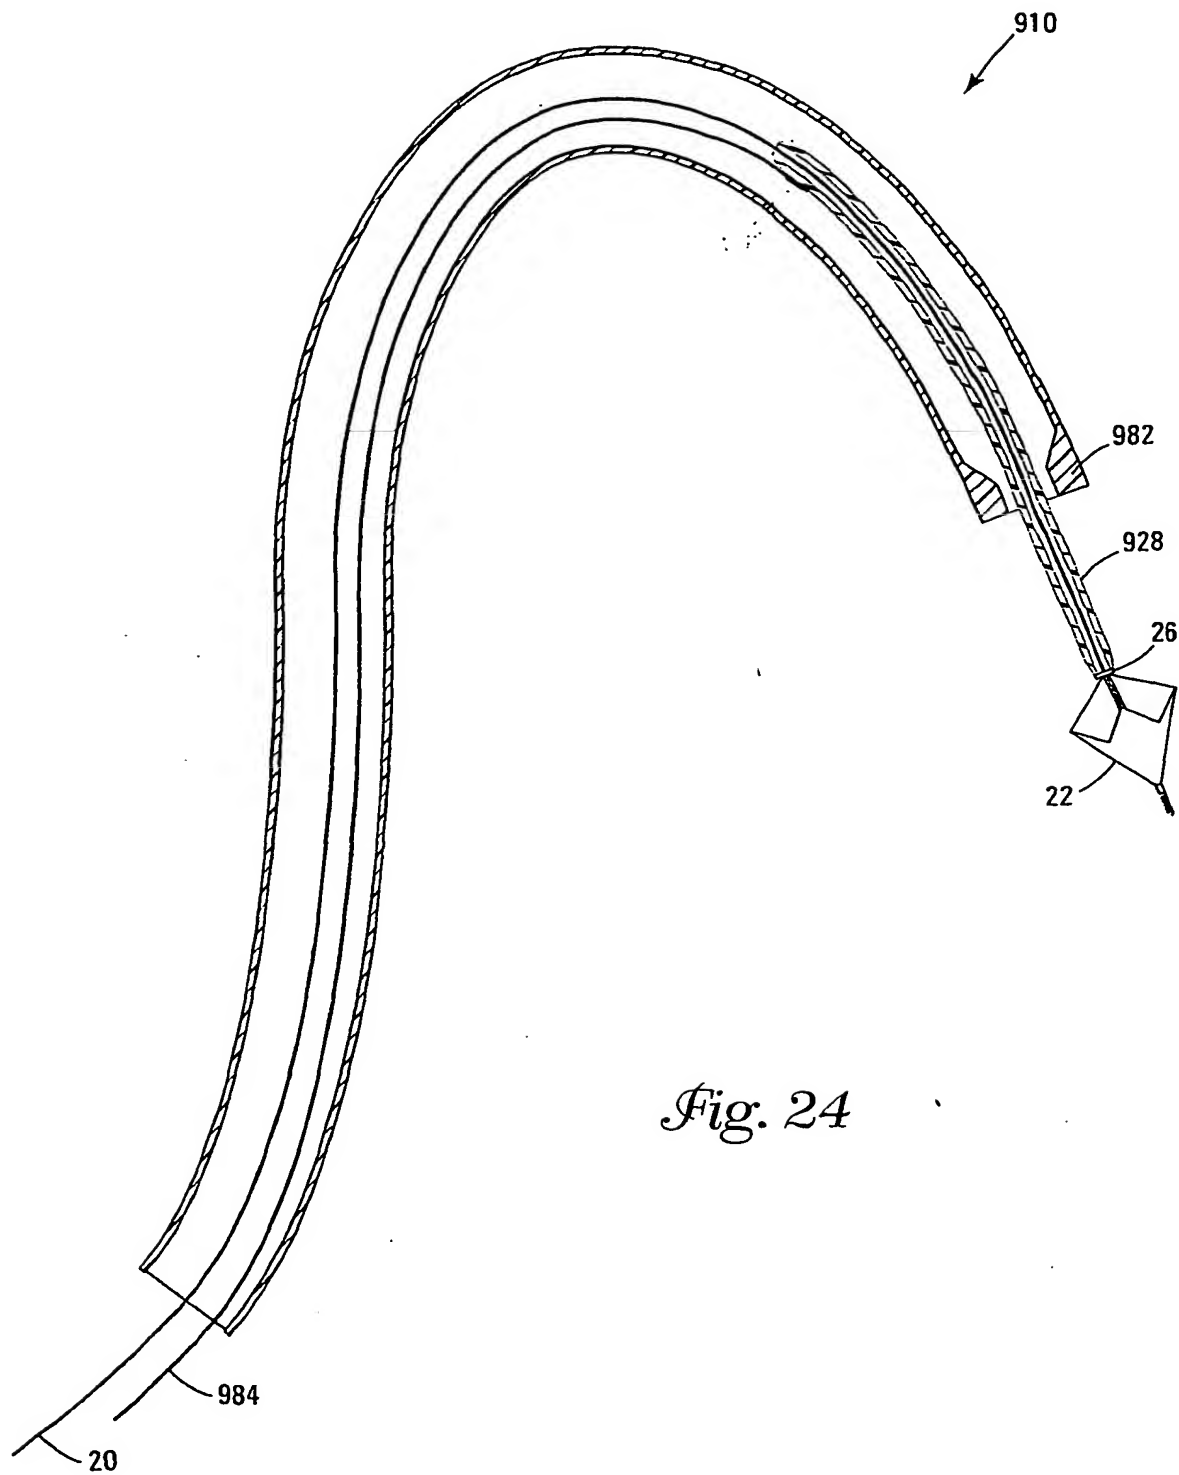


16/18

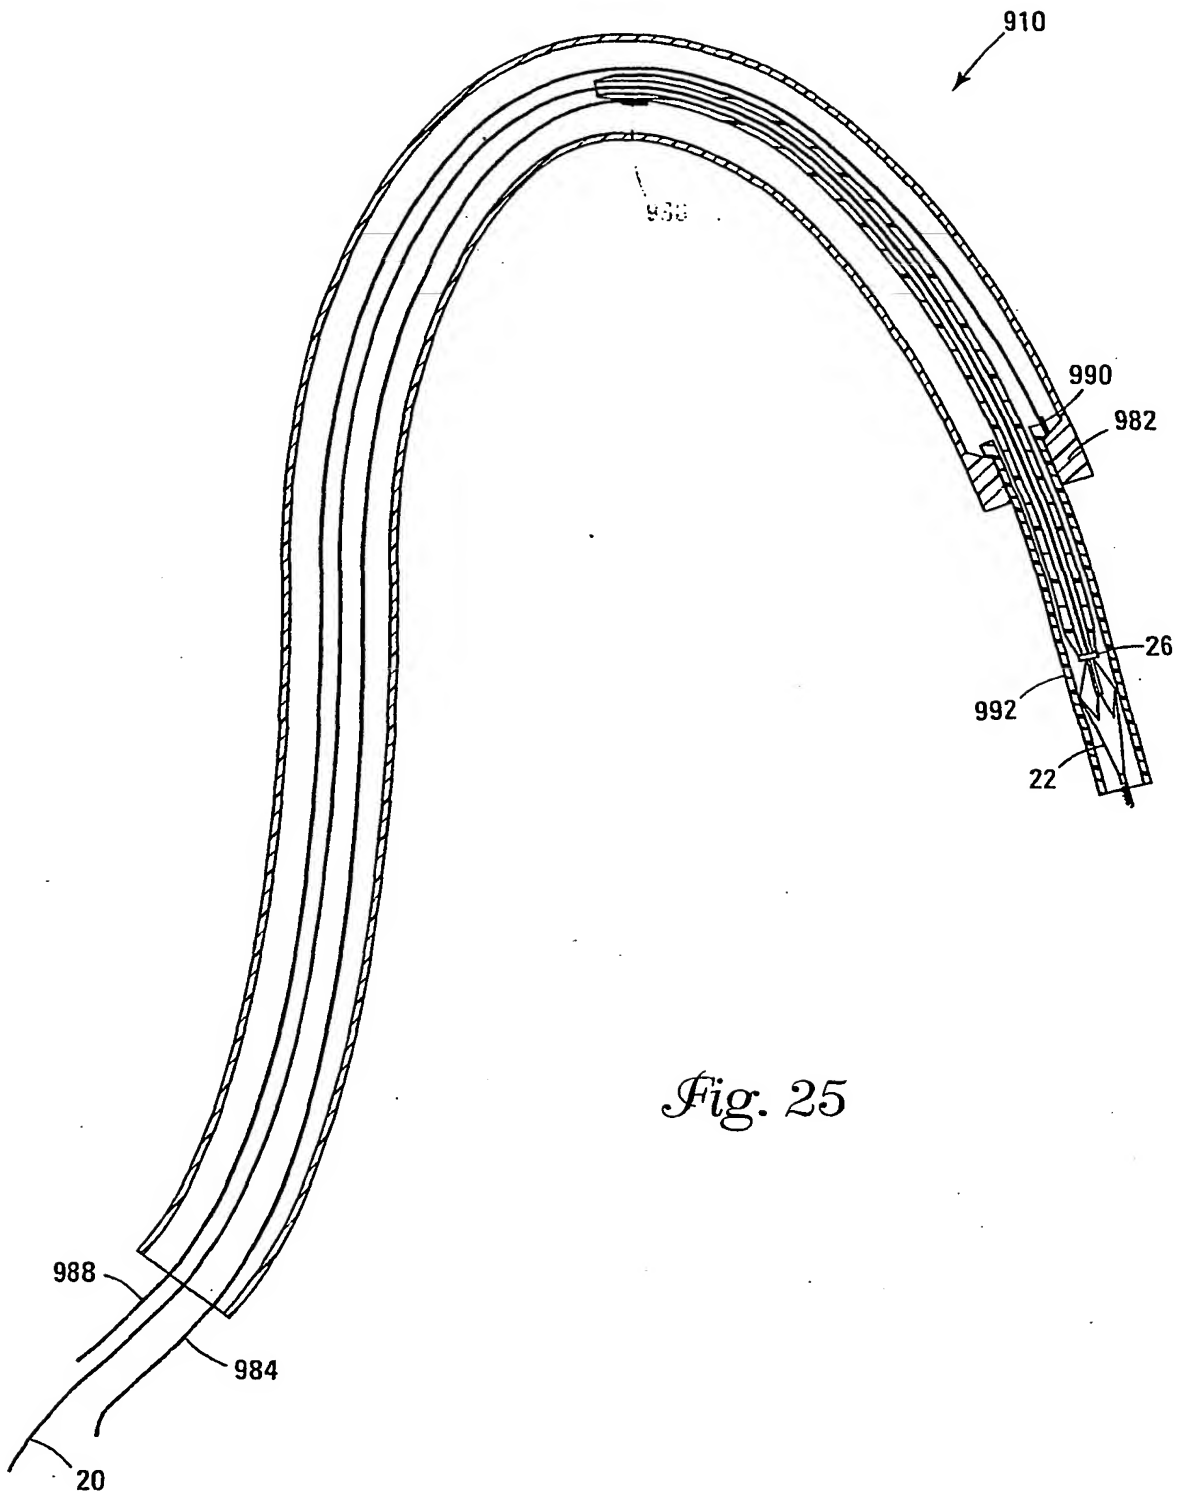


*Fig. 25*

17/18

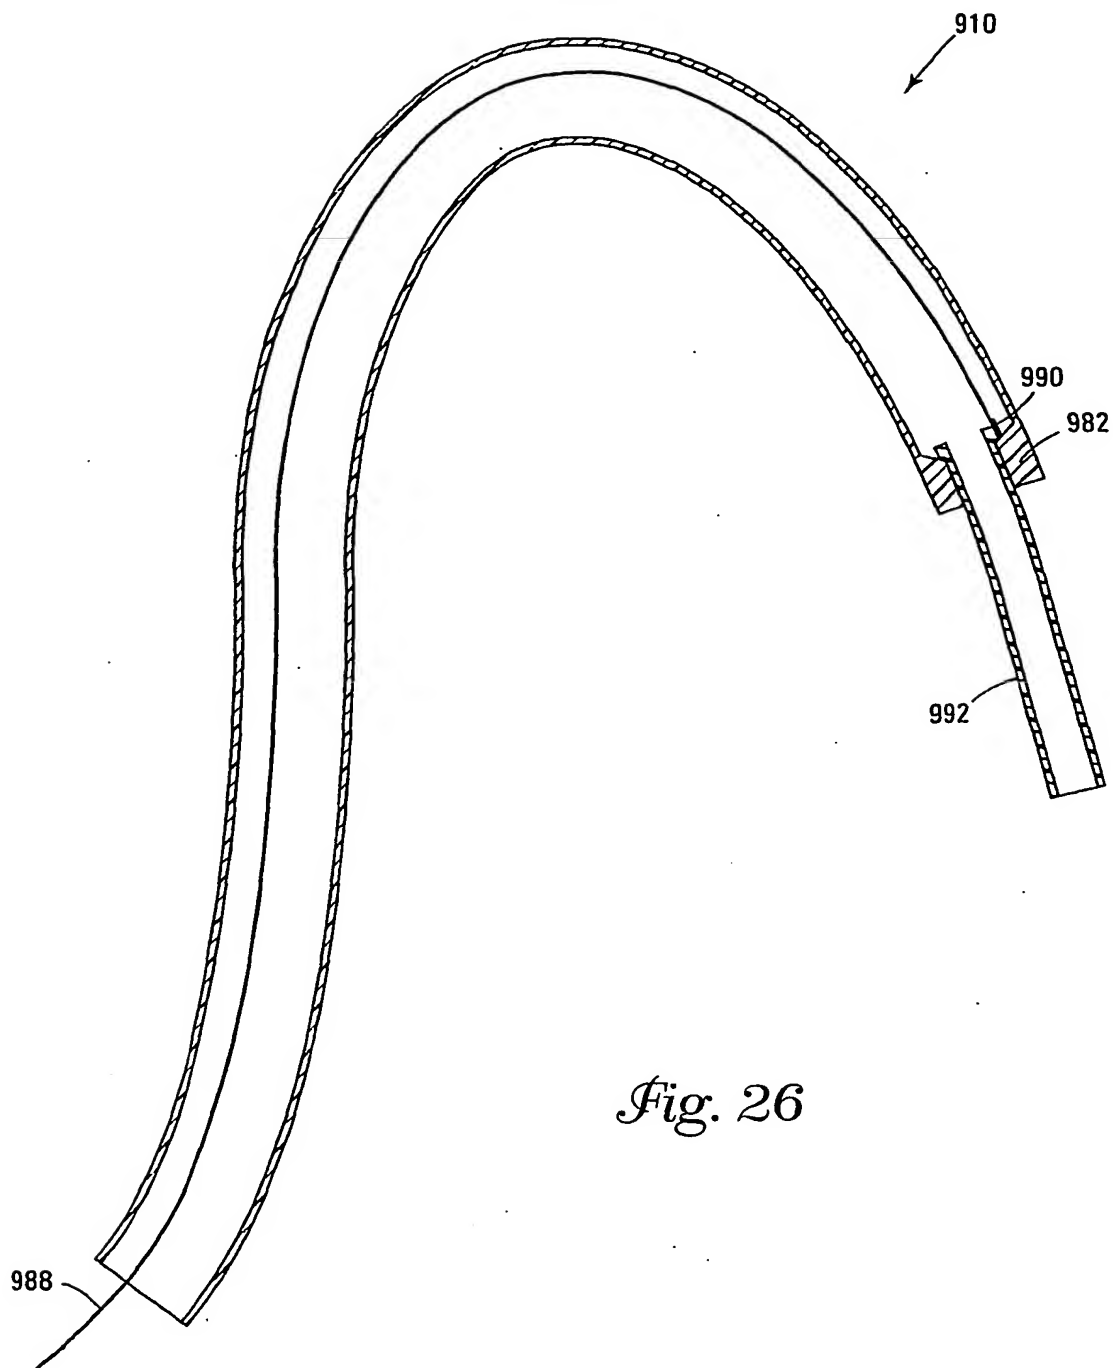*Fig. 26*

18/18

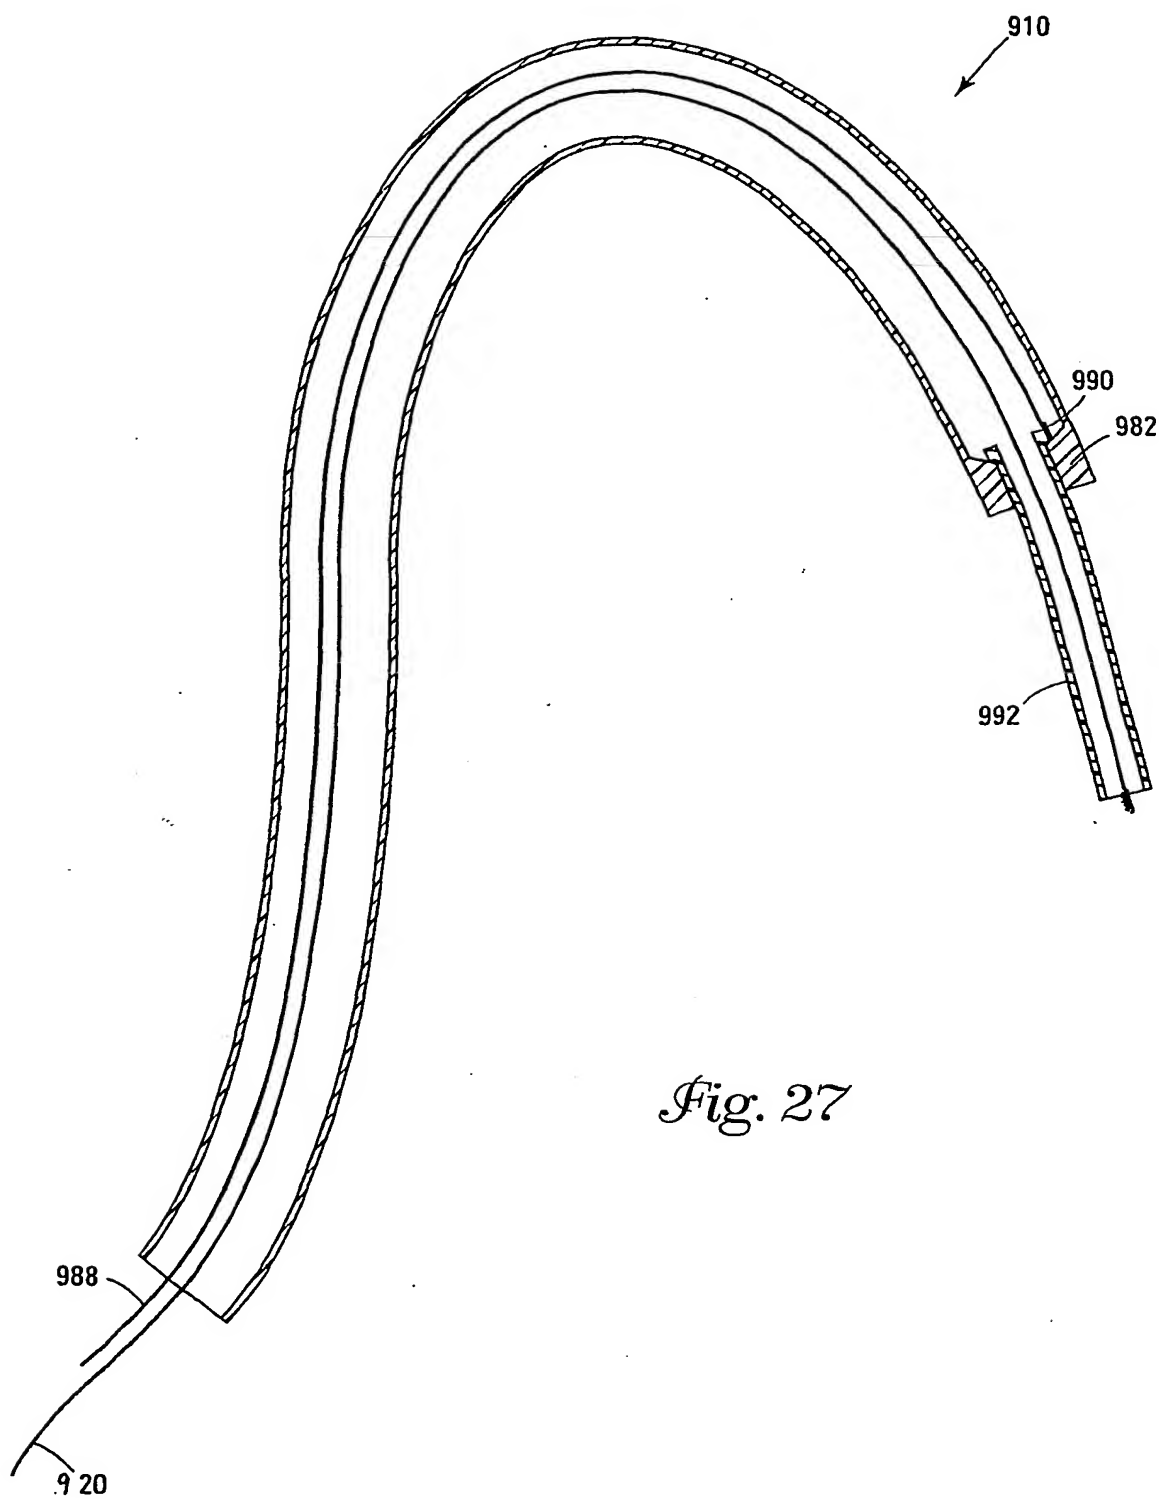*Fig. 27*